


Specifications


Noi	ninal Voltage	12V		
Rated Cap	pacity (20 hour rate)	70AH		
Dimension	Total Height (with terminals)	215mm(8.46 inches)		
	Height	211mm(8.31 inches)		
	Length	260mm(10.24inches)		
	Width	169mm(6.65inches)		
Weight		Approx.24.2kg (53.05Ibs)		

Characteristics


Capacity			20 hour ra	70AH					
1 0		10 hour ra	63AH						
77°F(25°C)			5 hour ra	57.5AH					
Internal Resistance			Full charg	5.5mΩ					
Capacity affected			104°F (40°C	102%					
			77°F(25°C)	100%					
			32 T (0℃)	85%					
(20 hour rate)		5 T (-15℃)	65%						
G IS D.			Capacity a	91%					
Self-Discharge 77°F(25°C)		Capacity a	82%						
		Capacity a	64%						
Standard Terminal			M6						
Max. Discharge Current 77°F (25°C)			1000A (5s)						
Cranking (Cranking Amps 30-sec amps to 7.2V @ 32° F (0° C)						
Performance		Cold Cranking Amps 30-sec amps to 7.2V @ 0° F (-18° C)							
Reserve Capacity			ity	@ 25Amps	115Min				
(Minutes to 10.5V at 80 F (27°C)			60 T (27℃)	@ 75Amps	31Min				
Charging	Cycle		Initial Charging Current 14A Or Small 14.5V~14.9V/77°F (25°C)						
(Constant Voltage)	Flo	oat	13.6V~13						

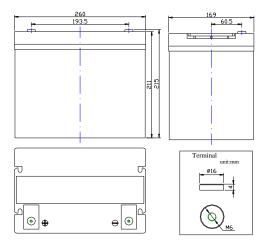

Discharge characteristics $77^{\circ}F(25^{\circ}C)$

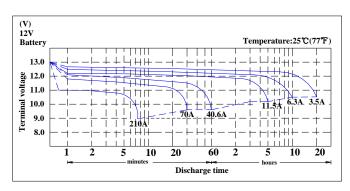

Duration of discharge vs. Discharge current

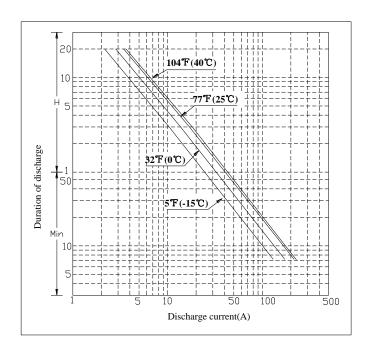

Constant Current Discharge Rating Amperes @ 77 °F (25°C)

Cut off voltage V/cell	15M	30M	45M	1H	2Н	3Н	5H	8Н	10H	12H	20H	24H
1.75V	115	76	48	39.8	21.1	15.8	11.1	7.6	6.30	5.37	3.50	2.93

FULLRIVER

DC BATTERIES