


Range: **DYNAMIC**  
 Type name: **CB60.0**

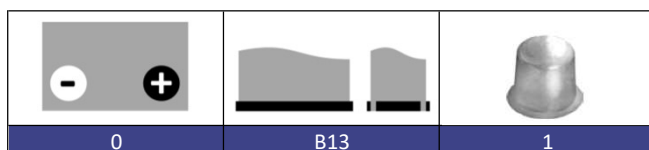

| PERFORMANCES*                          |             | CONFIGURATION |                      |
|--|-------------|---------------|----------------------|
| Voltage:                               | 12 V        | Size:         | 242x175x175 mm (LB2) |
| Capacity:                              | 60 Ah (20h) | Polarity:     | 0                    |
| C. Cranking (EN):                      | 480 A       | Terminal:     | 1 (taper)            |
| Vibration (EN):                        | V1          | Holddown:     | B13                  |
| Duration (EN):                         | E1          | Ventilation:  | Central              |
| Self-Discharge:                        | 12 months   | Maintenance:  | Not required (MF)    |
| (from the date of production, at 25°C) |             |               |                      |

\*According to standard EN 50342

| INTERNAL CONSTRUCTION |                    | COMPONENTS      |                           |
|-----------------------|--------------------|-----------------|---------------------------|
| Tecnology:            | Expanded           | Box/Recipiente: | PP/black                  |
| Alloy:                | Calcium            | Lid:            | Double, PP/black          |
| Separator:            | PE envelope        | Plugs:          | Thermal sealing, PP/black |
| Total Weight:         | 13,3 kg            | Handles:        | On lid, PP/black          |
| Acid:                 | Inside the battery |                 |                           |
| Origin:               | Europe             |                 |                           |

| RECOMMENDATIONS |  |
|-----------------|--|
| Storage:        | Check voltage every 6 months. Avoid exposure to sub-zero temperatures. |
| Recharge:       | Use automatic chargers with constant voltage.                          |
| Installation:   | Not applicable to Start-Stop vehicles.                                 |