


Range: **MAX**
 Type name: **CB100.0M**
 Barcode: **8436594880407**

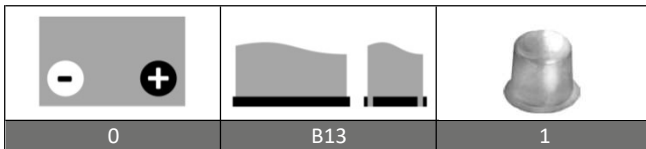

PERFORMANCES*		CONFIGURATION	
Voltage:	12 V	Size:	353x175x175 mm (LB5)
Capacity:	100 Ah (20h)	Polarity:	0
C. Cranking (EN):	820 A	Terminal:	1 (taper)
Vibration (EN):	V2	Holddown:	B13
Duration (EN):	E2	Ventilation:	Central
Self-Discharge:	12 months	Maintenance:	Not required (MF)
<small>(from the date of production, at 25°C)</small>			

*According to standard EN 50342

INTERNAL CONSTRUCTION		COMPONENTS	
Tecnology:	Punched	Box/Recipiente:	PP/black
Alloy:	Calcium	Lid:	Double, PP/grey
Separator:	PE envelope	Plugs:	Termal sealing, PP/grey
Total Weight:	21,9 kg	Handles:	On lid, PP/grey
Acid:	Inside the battery		
Origin:	Europe		

RECOMMENDATIONS	
Storage:	Check voltage every 6 months. Avoid exposure to sub-zero temperatures.
Recharge:	Use automatic chargers with constant voltage.
Installation:	Not applicable to Start-Stop vehicles.