

SPECIFICATION

CR17450H 3.0V

Electrical characteristics

(Typical values relative to cells stored for one year at +30 °C max)

○ Nominal capacity 2500mAh
Discharged capacity at 1k Ω , +25°C, 2.0V cut off

○ Nominal voltage 3.0V

○ Max. recommended continuous current 15mA
Discharged to 2.0V at +25°C permitting 50% of the nominal capacity to be achieved

○ Max. Pulse capability 150mA
Current value is obtaining 2.0V cell voltage when pulse is applied for 15 seconds at 50% discharge depth at 25°C

○ Operating temperature rang -30 °C ~ +60 °C

STORAGE:


Stored in clean, dry and cool circumstances (the temperature should be 20 degrees or lower, less than 30 degrees)

WARNING:

Don't charge, crush, disassemble, expose contents to water, heat above 100°C or may lead to explosion, burn or poison goods leakage. Discarded battery should be buried deeply to the ground.

Key features

- High and stable operating voltage
- Low self-discharge rate
● Annual self-discharge rate lower than 1% at +20°C
- Stainless steel
- Glass to metal seal
- Compliant with IEC 86-4 safety standard
- Non-restricted for transport

 UL Component Recognition
File Number MH46165


Main applications

- Alarms or security equipment
- Smoke detectors
- Memory backup
- Real time clock
- Professional electronic equipment
- Medical equipment


.....

CR17450H 2500mAh



Discharge characteristics at 25°C

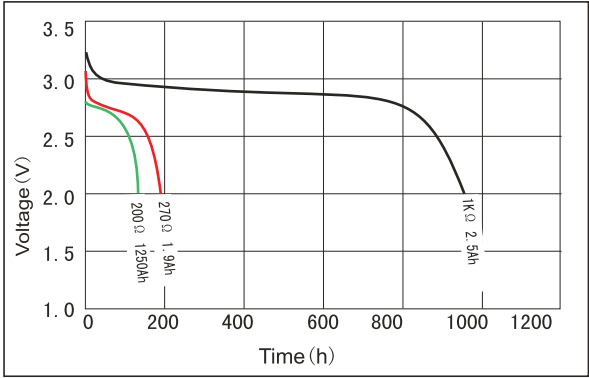

Voltage vs Current curve

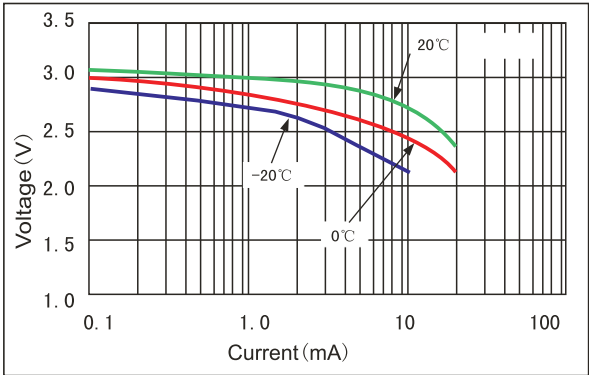

Capacity vs Current curve

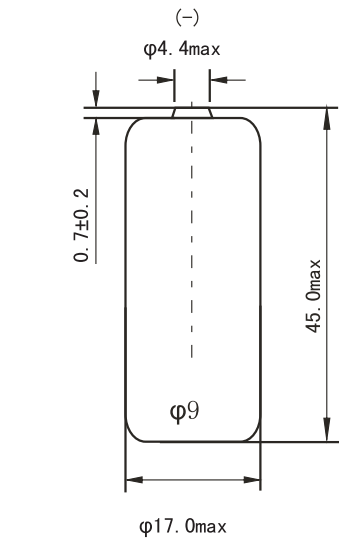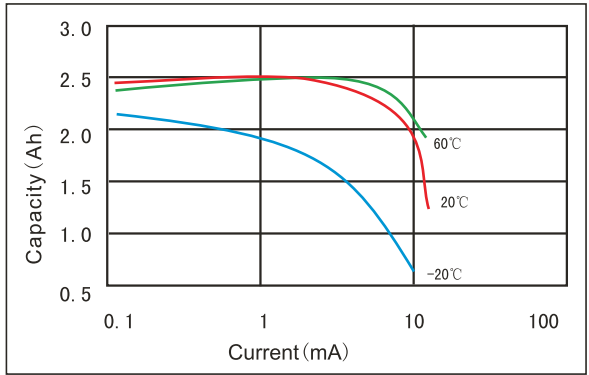

Dimensions in mm
Weight: 27g

Available Terminations

-/P*	Axial pin
-/T /PT2*	Radial Pin
-/PT /TP*	Polarized Tab
(*) : Reference to Standard Terminals for Single Cells	

Discharge characteristics after storage

