


## □DC140-12

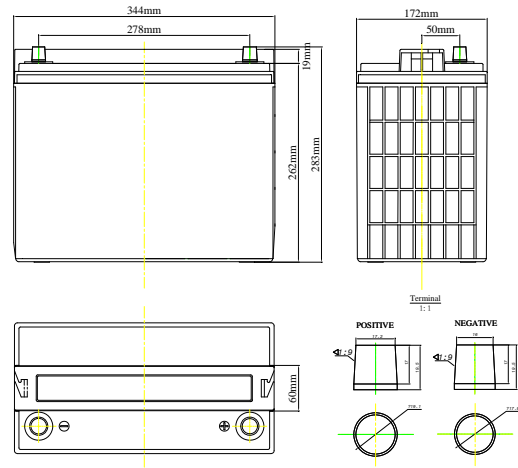


### Specifications

Nominal Voltage		12V
Rated Capacity (20 hour rate)		140AH
Dimension	Total Height (with terminals)	283mm(11.14inches)
	Height	280mm(11.02inches)
	Length	344mm(13.54inches)
	Width	172mm(6.77inches)
Weight		Approx.43.1kg (94.82lbs)


### Characteristics

Capacity 77°F (25°C)		20 hour rate (7A to 10.5Volts)	140AH
		10 hour rate (12.6A to 10.5Volts)	126AH
		5 hour rate (23A to 10.2Volts)	115AH
Internal Resistance		Full charged 77°F (25°C)	3.6mΩ
Capacity affected by Temperature (20 hour rate)		104°F (40°C)	102%
		77°F (25°C)	100%
		32°F (0°C)	85%
		5°F (-15°C)	65%
Self-Discharge 77°F (25°C)		Capacity after 3 month storage	91%
		Capacity after 6 month storage	82%
		Capacity after 12 month storage	64%
Standard Terminal		AP	
Max. Discharge Current 77°F (25°C)		1400A (5s)	
Cranking Performance	Cranking Amps (30-sec amps to 7.2V @ 32° F (0° C)		950A
	Cold Cranking Amps (30-sec amps to 7.2V @ 0° F (-18° C)		795A
Reserve Capacity (Minutes to 10.5V at 80°F (27°C)		@ 25Amps	260Min
		@ 75Amps	62Min
Charging (Constant Voltage)	Cycle	Initial Charging Current 28A Or Small 14.4V~14.9V/77°F (25°C)	
	Float	13.6V~13.8V/77°F (25°C)	

### Discharge characteristics 77 °F (25 °C)

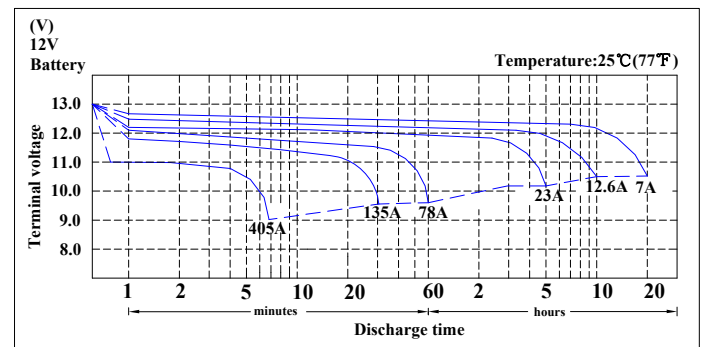

### Duration of discharge vs. Discharge current

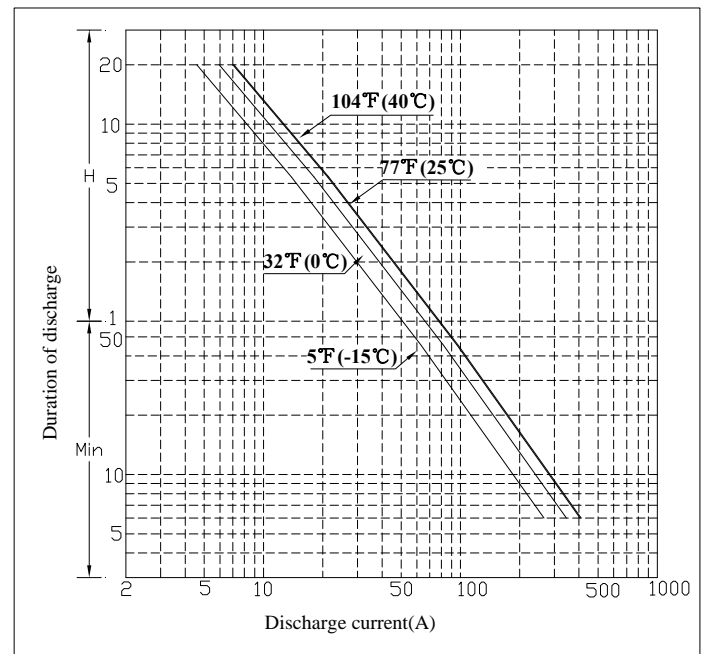

### Constant Current Discharge Rating Amperes @ 77°F (25°C)

Cut off voltage V/cell	30M	45M	1H	2H	3H	5H	8H	10H	12H	20H	24H
1.75V	135.2	96.7	76.9	44.3	31.8	22.7	15.3	12.6	10.9	7.0	5.9

FULLRIVER

DC BATTERIES

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specification are subject to modification without notice. Contact Fullriver for the latest information.