


□ DC40-12

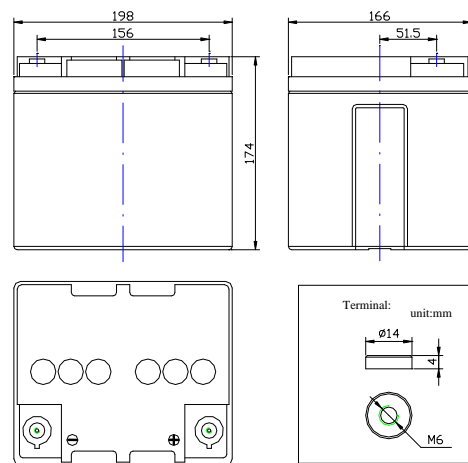


Specifications

Nominal Voltage		12V
Rated Capacity (20 hour rate)		40AH
Dimension	Total Height (with terminals)	174mm(6.85inches)
	Height	174mm(6.85 inches)
	Length	198mm(7.80 inches)
	Width	166mm(6.54inches)
Weight		Approx.13.4kg (29.54lbs)


Characteristics

Capacity 77°F (25°C)		20 hour rate (2.0A to 10.5Volts)	40AH
		10 hour rate (3.6A to 10.5Volts)	36AH
		5 hour rate (6.56A to 10.2Volts)	32.8AH
Internal Resistance		Full charged Battery 77°F (25°C)	9 m Ω
Capacity affected by Temperature (20 hour rate)		104°F (40°C)	102%
		77°F (25°C)	100%
		32°F (0°C)	85%
		5°F (-15°C)	65%
Self-Discharge 77°F (25°C)		Capacity after 3 month storage	91%
		Capacity after 6 month storage	82%
		Capacity after 12 month storage	64%
Standard Terminal		M6	
Max. Discharge Current 77°F (25°C)		600A (5s)	
Cranking Performance		Cranking Amps (30-sec amps to 7.2V @ 32° F (0° C)	320
		Cold Cranking Amps (30-sec amps to 7.2V @ 0° F (-18° C)	275
Reserve Capacity (Minutes to 10.5V at 80°F (27°C)		@ 25Amps	53Min
		@ 75Amps	-
Charging (Constant Voltage)	Cycle	Initial Charging Current 8A Or Small 14.5V~14.9V/77°F (25°C)	
	Float	13.6V~13.8V/77°F (25°C)	

Discharge characteristics 77°F (25°C)

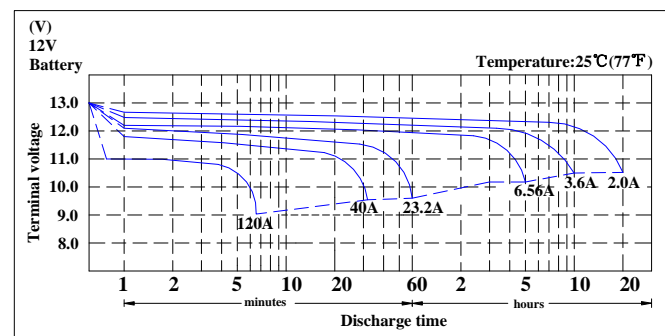

Duration of discharge vs. Discharge current

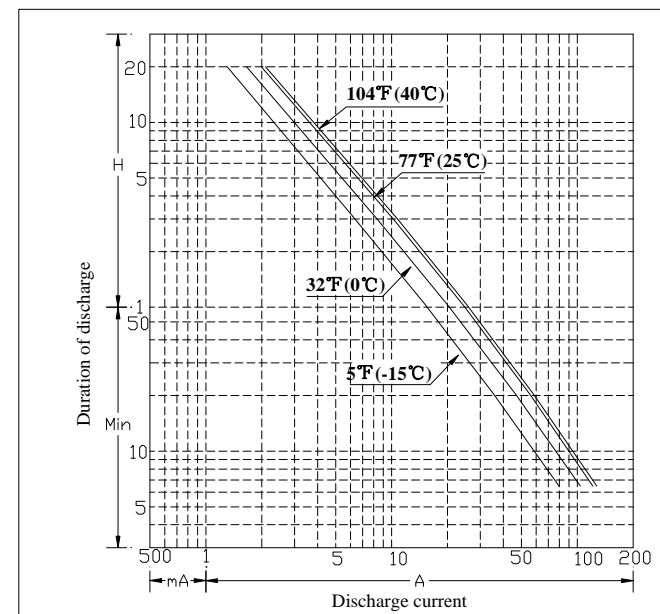

Constant Current Discharge Rating Amperes @ 77 °F (25°C)

Cut off voltage V/cell	15M	30M	45M	1H	2H	3H	5H	8H	10H	12H	20H	24H
1.75V	60	38	28	22.7	12.0	9.1	6.3	4.4	3.60	3.07	2.00	1.67

FULLRIVER

DC BATTERIES

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specification are subject to modification without notice. Contact Fullriver for the latest information.