



# HC30

## SPECIFICATIONS

### BATTERY DESIGN

- Absorbent glass mat (AGM) technology 12V battery VRLA
- Can be mounted in any orientation except inverted.
- US DOT and IATA certified non-spillable
- Can be fitted with TP brass automotive adaptor on request.
- Sealed Construction (Non-Spillable Battery)
- Shipped fully charged - just install and go!
- Suited for repeated discharges such as running your vehicle with winches or other electrical accessories.

### PERFORMANCE FEATURES

- ✧ PHCA: 950A at 80°F (27°C) for 5 seconds
- ✧ CCA: 450A at 0°F (-18°C)
- ✧ CA/MCA: 550A at 32°F (0°C)
- ✧ HCA: 635A at 80°F (27°C)
- ✧ Reserve capacity: 60minutes
- ✧ Short circuit current: 1550A
- ✧ Operation temperature range: -5°F (-15°C) to 122°F (50°C)

### Nominal Dimensions

Length		Width		Height		Total Height		Weight	
mm	in	mm	in	mm	in	mm	in	kg	pound
250±2	9.84	97±2	3.82	142±2	5.59	156±2	6.14	10.60	23.37



### HIGH RATE DISCHARGE AT 77°F (25°C)

5 sec.	10 sec.	20 sec.	30 sec.
950A	850A	720A	635A

### EXTENDED DISCHARGE AT 77°F (25°C) TO 10.02V

5min	15min	1hr	3hr	5hr	10hr	20hr
134A	60.8A	20.2A	7.89A	5.0A	2.72A	1.50A

### PHYSICAL CHARACTERISTICS

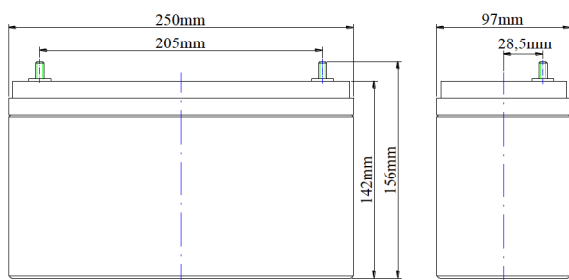

Terminal: M6M

