



LIVEN LVDC Series

LVDC series are manufacturing with Lead Carbon active material to perform in partial state of charge (PSoC) applications and double separator configuration. LVDC series are AGM-GEL technology Valve Regulated Lead Acid (VRLA) suitable for Deep Cycle applications. Electrolyte + GEL for longer cycle life. Maintenance-Free Sealed Lead Acid Battery.

Applications:

- Wheelchairs
- Golf trolleys
- Electric sweepers
- Floor machines
- Electric vehicles
- Lawn mowers
- Portable power
- Railway and Marine systems
- Medical equipments
- Renewable energies

Dimensions:

Length	260±1.5mm (10.2in)
Width	168±1.5mm (6.61in)
Height	211±1.5mm (8.31in)
Total Height	214±1.5mm (8.43in)

Specifications:

Cells Per Unit	6
Voltage Per Unit	12V
Nominal Capacity	100.0Ah @20hour-rate to 1.75V per cell @25°C 89.0Ah @5hour-rate to 1.75V per cell @25°C
Weight	Approx. 25.8Kg ±2% (56.9lbs)
Terminal	R6.4
Recommended Maximum Charging Current	20.0A
Cycle Use Voltage	14.70V@ 25°C Temperature Compensation: -4mV/°C/Cell

Operating Temperature Range	Discharge: -20°C~55°C
	Charge: 0°C~40°C
	Storage: -15°C~40°C


Normal Operating Temperature Range	25°C±5°C
------------------------------------	----------

Self Discharge

LIVEN Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.

Container Material	ABS
--------------------	-----


Technical Drawings:

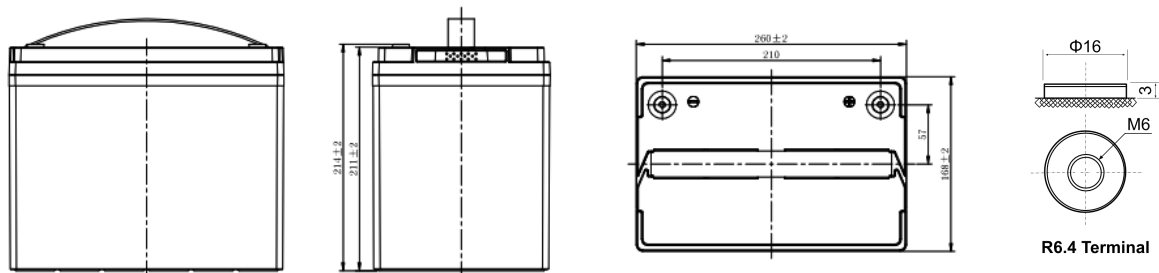


Constant Current Discharge (CC, Unit: A) at 25°C (77°F)

Voltage (V)	Capacity (Ah)				Reserve Capacity (Min)	
	20h	10h	5h	3h	25A	56A
12	100	92	89	80	192	65


Charging Profile

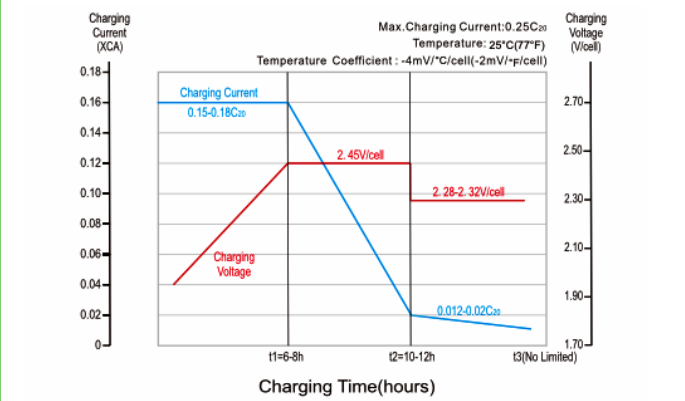

Relationship of OCV and State Of Charge(25°C,77°F)

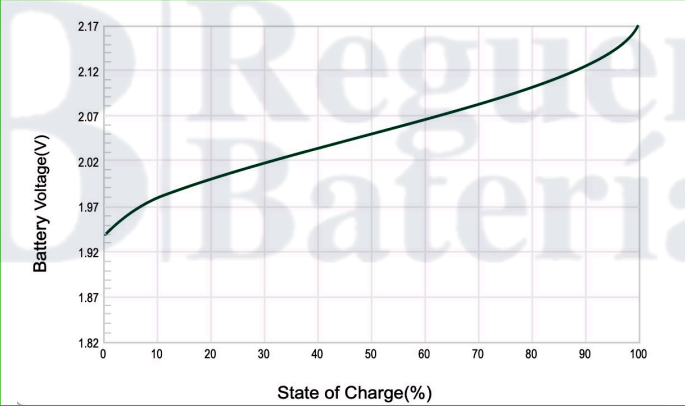

Cycle Life in Relation to Depth Of Discharge

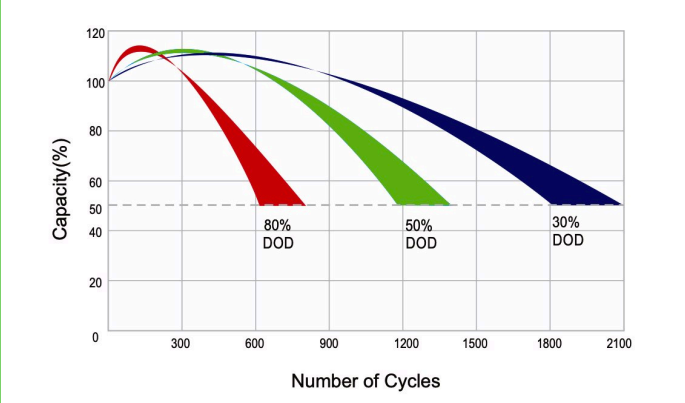

Self-discharge Characteristic

