Reguero Baterías 12V 18.0Ah



LIVEN LVIF-G Golf Series

High performance, completely maintenance-free, low selfdischarge.

Floating & standby use: up to10 years @25°C.

100% precise quality testing, stable quality and high reliable performance.

Uniform output voltage in all the discharge curve.

Provide full nominal capacity, even at high currents.

Energy density: up to 130Wh/kg.

Capacity density: up to 145Ah/kg.

Suitable for standby power and energy storage power use. Long storage time.

Cycle use: Up to 2000 cycles at 100% DOD.


Applications:

- · Golf trolleys and Golf cart
- Wheelchairs and Scooters
- DC power supply
- Electric Power System (EPS)

Dimensions:

| Length | 168±2mm (6.61in) |
|--------------|------------------|
| Width | 128±2mm (5.04in) |
| Height | 75±2mm (2.95in) |
| Total Height | 93±2mm (3.66in) |

| Specifications: | | |
|---|----------------------|--|
| Nominal Voltage | | 12.8V |
| Nominal Capacity | | 18.0Ah ±1Ah @0.2C @25°C |
| Weight | | Approx. 2.2Kg ±0.1kg (4.85lbs) |
| Discharge | | |
| | Normal Current | ≤ 15A |
| | Max. Contin. Current | 20A @5min |
| | Max. Peak Current | 25A @5s |
| | Cut-Off Voltage | 10.0V ±0.2V |
| Charge | | |
| | Charge Voltage | 14.4V ±0.15V |
| | Charge Current | ≤ 4A |
| | Charge Mode | CC/CV, use special LFP Charger |
| Discharge Inner Resistance | | ≤ 45mΩ |
| Configuration | | 04S05P |
| Operation Temperature Range ¹ | | Discharge: -20°C~60°C Charge: 0°C~45°C |
| Storage Temperature Range | | 0°C∼40°C 15°C∼25°C (Long term storage) (Capacity 80%) |
| Humidity Range ¹ | | Charge/Discharge: RH= 85% ² Storage: RH= 50% ² |
| BP Protection - BMS Features ³ | | OVP, UVP, SC, TEMP, BF |
| Battery Pack Housing | | Plastic Case |
| Cycle | | Standard charge at 0.2C (A), rest 0.5~1h, discharge at 0.2C to cut off voltage, rest 0.5~1h, repeat the above steps until 2000 |

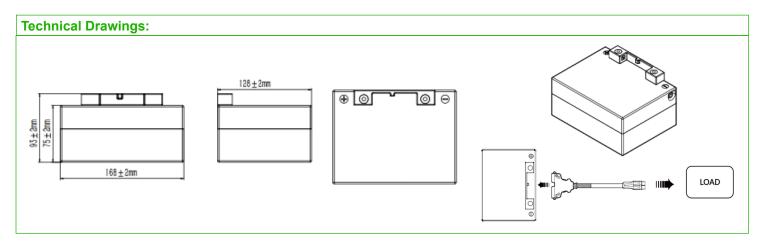

⁽¹⁾ When the environment temperature is higher than 45°C, please pay attention to ventilation and heat rejection.

⁽²⁾ When humidity is higher than 85%, pay attention to protect, easily oxidized components note sealed.

⁽³⁾ OVP=Over charge protection; UVP=Over discharge protection; SC=Short-circuit; TEMP=Temp. levels protection; BF=Balanced Function


cycles. (capacity retention rate= 80%)




GOLF LiFePO₄ Lithium Battery







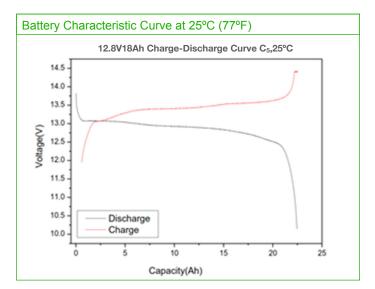


Cell feature Curves at 25°C (77°F)

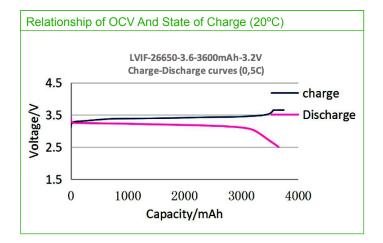

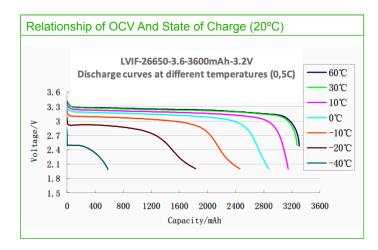

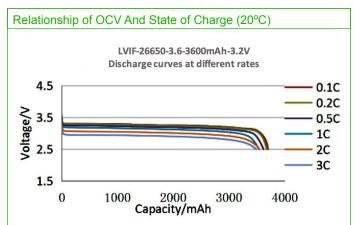

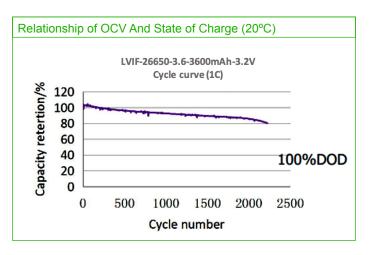

V02 03/23

LVIF18-12G