LVIL-18650-2.5/8C-3.6

Lithium-ion Rechargeable Cell



LIVEN LVIL Series

Designed only for Li-Ion / LiPO Batteries.

High performance, completely maintenance-free, low self-discharge. Nominal Voltage: 3,6V per cell. Charge Voltage: 4,2V per cell. Discharge Cut-off Voltage: 2,75V per cell. Floating & standby use: up to 10 years.

100% precise quality testing, stable quality and high reliable performance. Uniform output voltage in the entire discharge curve. Long storage time.


Storage temperature range (-20°C \sim 45°C). Working temperature range. (-20°C \sim 60°C). Cycle use: Up to 1000 cycles at 80% DOD.

Applications:

- · All Purpose.
- · Industrial Equipment.
- Solar Lighting.Lawn Lamp.
- Electric Tool.Toy model.
- Energy Storage.
- New Energy Vehicles.
- DC Power Supply.
- · Medical Equipment.

Dimensions:	
Length	65.4±0.2mm (2.57in)
Diameter	18.3±0.2mm (0.72in)

Specifications:		
Nominal Voltage		3.6V
Nominal Capacity		2500mAh @0.2C
Weight		Approx. ≤46g (0.10lbs)
Discharge		
	Normal Current	20000mA
	Max. Contin. Current	25000mA
	Pulse Current	25000mA, 5s
	Cut-Off Voltage	2.5V ±0.05 V
Charge		
	Charge Voltage	4.2V ±0.05V
	Max. Current	2500mA
	Charge Mode	CC/CV, use special Lithium-Ion Charger
Internal Resistance		≤ 20mΩ
Operation Temperature Range ¹		Discharge: -10°C~60°C Charge: 0°C~45°C
Storage Temperature Range		0°C~40°C 15°C~25°C (Long term storage) (Capacity 80%)
Humidity Range ¹		Charge/Discharge: RH= 85% ² Storage: RH= 50% ²
Battery Pack Housing		Plastic Case
Normal Temperature Cycle		>800 Cycles @ 100% DOD >1000 Cycles @ 80% DOD >1200 Cycles @ 50% DOD

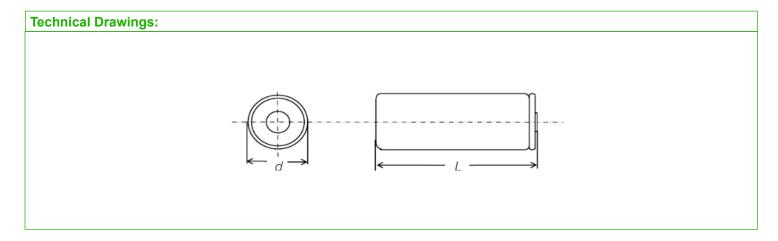

- (1) When the environment temperature is higher than 45°C, please pay attention to ventilation and heat rejection.
- (2) When humidity is higher than 85%, pay attention to protect, easily oxidized components note sealed.

