

N77L3X0_1 70 Ah

According to EN 50342



**EFB
Start Stop**

SEALED MAINTENANCE FREE



Electrical specification

Voltage:	12V
Capacity:	70 Ah
Cold cranking current:	680 A [EN]
Cold cranking current:	410 A [DIN]

Mechanical specification

Dimensional group:	L3
ETN reference:	570 002 068
DIN reference:	57002
Dimensions (LxWxH):	278x175x190
Cell Layout:	0
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B13
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	GREY

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	GREY


Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level	Micro-cycle performance
W4	C2	V2	E2	M1

Weight

Battery weight:	13.40
Acid weight:	5.80
Total battery weight:	19.20

Layout

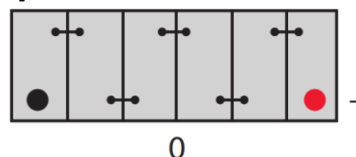

Hold-down



Separator

Type	PE
-------------	-----------