



Series	FLA FS SERIES	Warranty	1 Year
Volts	12	Design	GC12
Cells	6	Plates/Cell	11
Terminal Type	UTL		
Included Hardware	Stainless Steel K-Lock Nut		
Size & Thread	5/16"-18		

Charge | Discharge

Charge Voltage Range	14.7-15 V/cell @ 25°C (77°F)
Recommended Charge Current	15 A
Maximum Charge Current	25 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	563
Marine Crank Amps (MCA) 32°F / 0°C	703
Reserve Capacity (RC @ 25A)	280 Minutes
Reserve Capacity (RC @ 56A)	100 Minutes
Reserve Capacity (RC @ 75A)	69 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	75%	50%


Hour Rate	Capacity / AMP Hour	Current / Amps
@ 100 Hour Rate	206 AH	2.06 A
@ 72 Hour Rate	195 AH	2.71 A
@ 50 Hour Rate	184 AH	3.69 A
@ 20 Hour Rate	155 AH	7.75 A
@ 15 Hour Rate	147 AH	9.82 A
@ 10 Hour Rate	136 AH	13.64 A
@ 8 Hour Rate	133 AH	16.66 A
@ 5 Hour Rate	122 AH	24.49 A
@ 1 Hour Rate	62 AH	62 A

Specifications		
Weight	37.5 kg	82.5 lbs
Length	333 mm	13.13"
Width	182 mm	7.17"
Height Incl. Term.	274 mm	10.8"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Electrolyte Reserve	38 mm	1.5"
Container	Polypropylene	
Cover	Polypropylene	
Handles	Top Molded Strap Brackets	
<ul style="list-style-type: none"> • Plastics are UL94 HB (UL94-V2 available) • Plastics are impact copolymer rated to ASTM D256, D5420 • Vented design with integral flame arrestor vent caps 		


Cycle Life vs. Depth of Discharge

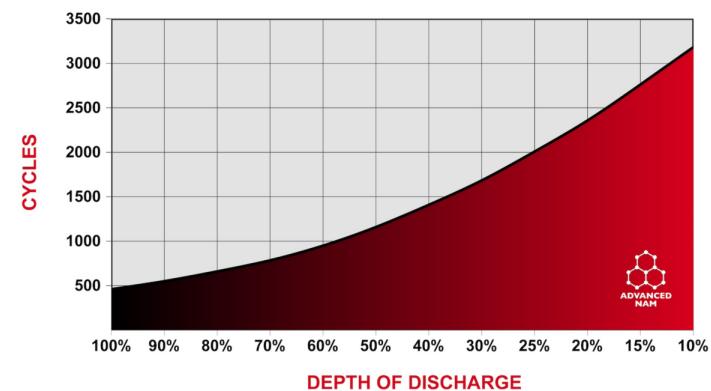

Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.07 V	2.00 V	1.92 V	1.75 V
10 HR AH RATE	2.10 V	2.06 V	1.98 V	1.89 V	1.75 V
3 HR AH RATE	2.10 V	2.03 V	1.95 V	1.86 V	1.75 V
1 HR AH RATE	2.10 V	2.01 V	1.93 V	1.84 V	1.75 V

Detailed Illustration

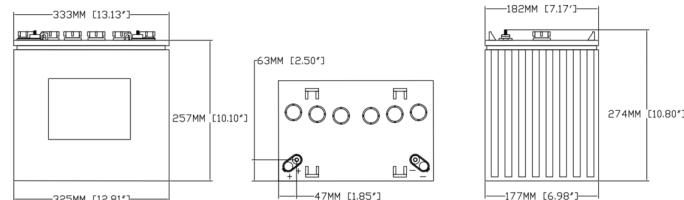

Designed in compliance with applicable BCI, DIN, BS & IEC standards.
Tested in compliance to BCI & IEC standards.



ISO 9001:2015
CERTIFICATION
0122624