



General Series

General Series Valve Regulated Lead Acid batteries are designed with AGM (Absorbent Glass Mat) technology, high performance plates and electrolyte to gain extra power output for common power backup system applications widely used in the field of UPS, Emergency Lighting System.

Application


- ? Alarm System
- ? Cable Television
- ? Communication Equipment
- ? Control Equipment
- ? Security System
- ? Medical Equipment
- ? UPS
- ? Power tools
- ? Emergency Power System
- ? Toys

General Features




- ? Sealed and maintenance free operation.
- ? Non-Spillable construction design.
- ? ABS containers and covers(UL94HB, UL94V-0) optional.
- ? Safety valve installation for explosion proof.
- ? High quality and high reliability.
- ? Exceptional deep discharge recovery performance.
- ? Low self discharge characteristic.
- ? Flexibility design for multiple install positions.

Construction


- ? ComponentRaw material
- ? PositiveLead dioxide
- ? NegativeLead
- ? ContainerABS
- ? CoverABS
- ? SealantEpoxy Resin
- ? Safety valveEPDR
- ? TerminalCopper
- ? SeparatorFiber glass
- ? ElectrolyteSulfuric acid

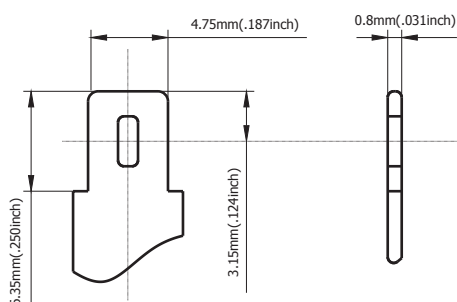

Terminal Dimensions

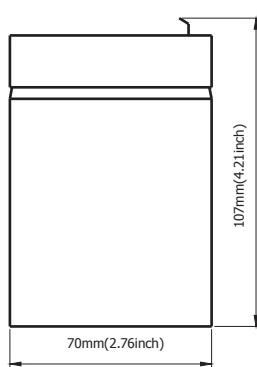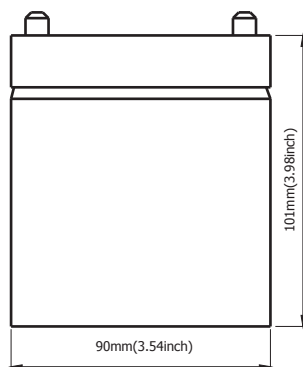

Battery Model	KA12V5F1			
Designed Floating Life	5 Years			
Capacity(25°C)	20HR(0.25A,1.75V)	10HR(048.A,1.75V)	5HR(0.85A,1.75V)	1HR(3.07A,1.75V)
	5.0AH	4.8AH	4.25AH	3.AH
Dimensions	Length	Width	Height	Total Height
	90mm(3.54inch)	70mm(2.76inch)	101mm(3.98inch)	107mm(4.21inch)
Approx. Weight	1.79Kg (3.95 lbs)			
Internal Resistance	Full charged at 25°C: 0.025 Ohm			
Self Discharge	3% of capacity declined per month at (25°C)			
Capacity Affected by Temp.(20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage(25°C)	Cycle use		Float use	
	14.4-15V(-30mV/ °C), max. Current: 1.5A		13.6-13.8V(-20mV/ °C)	

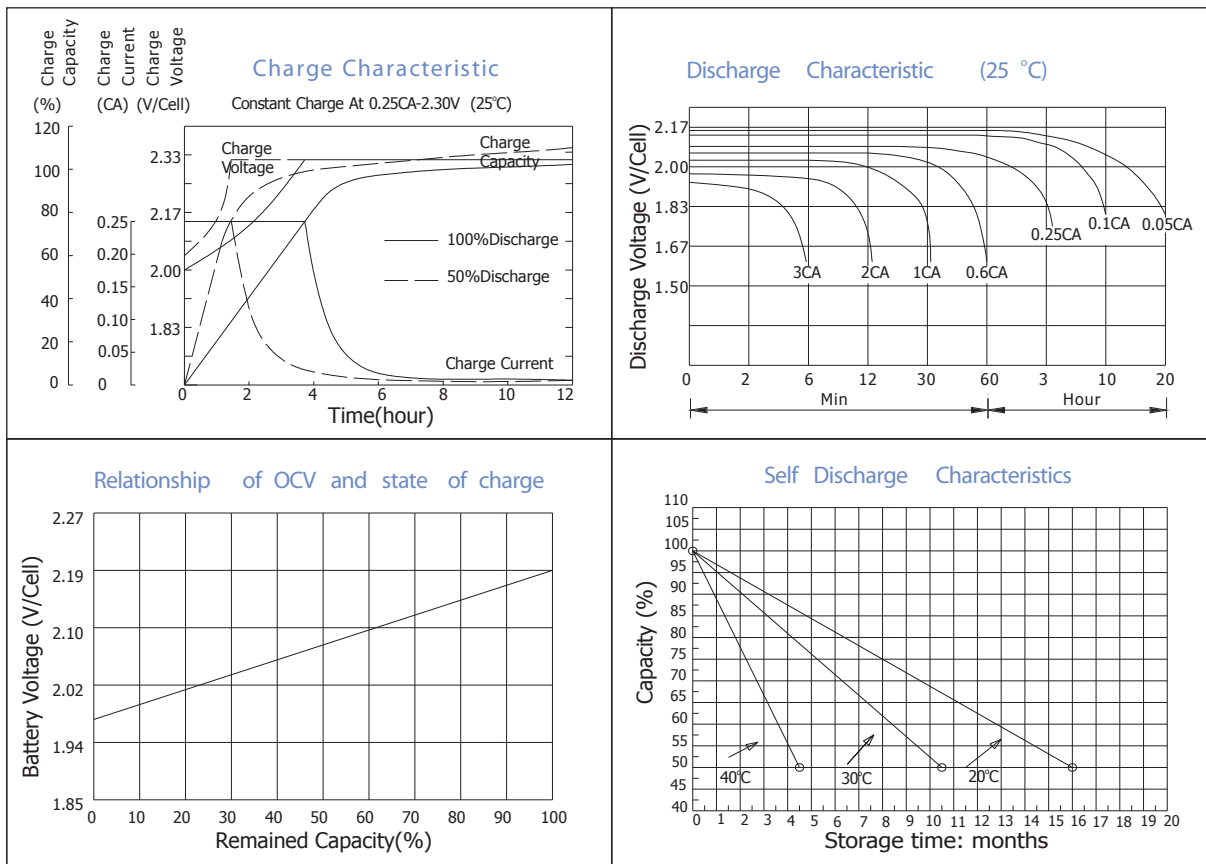

Constant current discharge ratings-amperes at 25 °C

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	3HR	5HR	10HR	20HR
1.60V	18.5	11.5	8.67	5.29	3.36	1.48	0.90	0.50	0.27
1.67V	17.3	10.9	8.34	5.06	3.32	1.42	0.88	0.50	0.26
1.70V	15.9	10.5	8.15	4.60	3.22	1.32	0.86	0.49	0.25
1.75V	15.6	10.2	7.88	4.37	3.07	1.28	0.85	0.49	0.25
1.80V	13.9	9.72	7.16	4.05	2.87	1.23	0.79	0.48	0.24
1.85V	12.3	9.26	6.44	3.72	2.67	1.19	0.74	0.47	0.23

Constant power discharge ratings-watts at 25 °C

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	3HR	5HR	10HR	20HR
1.60V	32.8	21.0	16.0	9.63	6.13	2.64	1.54	1.02	0.54
1.67V	31.6	20.4	15.8	9.43	6.09	2.56	1.53	1.01	0.52
1.70V	29.8	20.2	15.7	8.83	5.98	2.45	1.51	1.01	0.51
1.75V	30.0	20.2	15.5	8.56	5.88	2.39	1.50	0.99	0.50
1.80V	27.4	19.9	14.4	8.17	5.54	2.32	1.45	0.98	0.48
1.85V	24.9	18.9	13.1	7.65	5.21	2.25	1.41	0.97	0.47

