




EQ-27

Carbon Nano Gel Bloc

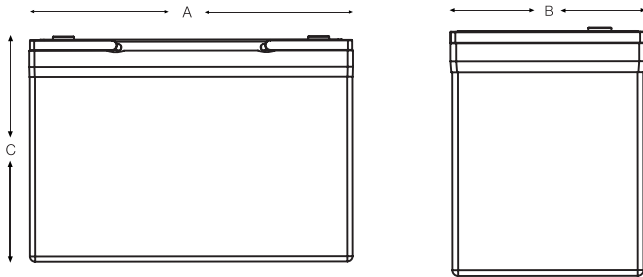

Left - Negative Right - Positive

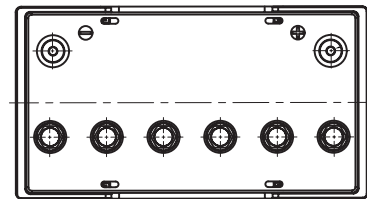

Electrical Specifications

Voltage	12V
M.R.C. 25 Amps	165
Self Discharge	Less than 3% per month (20°C/68°F)
Charge Temperature	Min: -10°C (14°F) / Max: 50°C (122°F)
Discharge Temperature**	Min: -40°C (-40°F) / Max: 50°C (122°F)
Storage	Min: -20°C (-4°F) / Max: 60°C (140°F)
Charge Methods	Float Voltage: 2.25 @ 25°C / 77°F Boost Voltage: 2.35 to 2.40VPC @ 25°C / 77°F
Temperature Compensation	±3.5mV/°C/Cell

Cell Type Ue (100%) / VPC Ref Temp	C5 1.70 25°C	C10 1.75 25°C	C20 1.75 25°C	C100 1.80 25°C
EQ-27	78	81	87	92

** CAUTION: Depths of discharge, operating voltages and currents, when designing systems for use at maximum temperatures, will vary.

Mechanical Specifications

Industry Reference	BCI 27	
Length (A)	12.1 in	307 mm
Width (B)	6.6 in	168 mm
Height (C)	8.3 in	211 mm
Weight	65 lbs	29.5 kgs
Terminal (Opt'l)	M8	
Cell(s)	6	
Electrolyte	Gel	
Terminal Torque Nm	8	

NOTE: There is a tolerance of +/-2%.

Terminal Options Available:

M8
A-Pole
Dual
Stud

ET/DATAQUASAR GEL EQ-27 V6 0625

Features

Maintenance free - no topping up required

Ultra energy efficient due to low resistance

Reduced operating temperatures for increased cycle life (up to 1000 cycles) and battery lifetime

Cost savings due to increased efficiency

Up to 2 x faster recharge

Increased design life from 12 to 15 years

Allows for opportunity charging to give you those extra running times when required

Suitable for extreme temperature variants

Applications: all motive, leisure & solar:

Electric vehicles, including cleaning machines

Wheelchairs

Electric Working Platforms

UPS Systems

Traffic Systems

Telecommunications & Emergency Lighting

Caravans / Motorhomes RV's & Maritime

Solar & Renewable Energy & Home Inverter


Compliant with EN60254-1&2 and IEC254-1/2

Charging profile


IU Charging $I = \text{min. } 12\% C_5 \text{ max. } 30\% C_5$
 $U = 2.4 \text{ V per cell}$

IUI Charging $I_1 = \text{min. } 12\% C_5 \text{ max. } 40\% C_5$
 $U = 2.35 \text{ V per cell}$
 $I_2 = 1.5\% C_5 \text{ for max. 4 hours}$


Self discharge at different temperatures

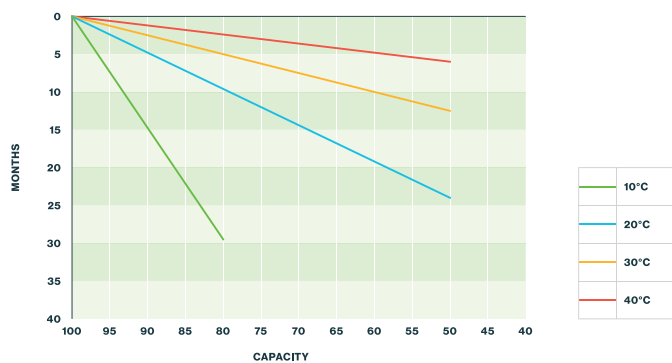

Capacity vs. temperature

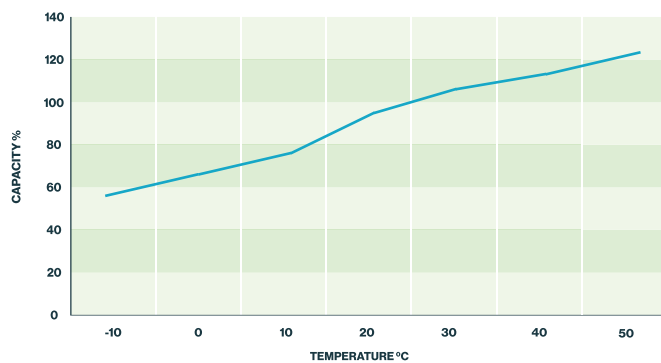


Storage: Determine the state of charge

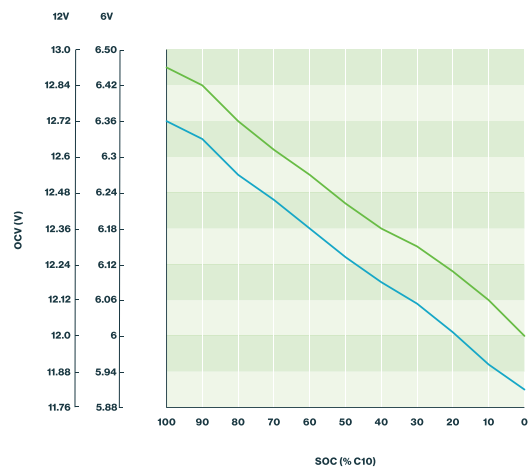

OCV max
OCV min

Relation between charging, voltage and temperature

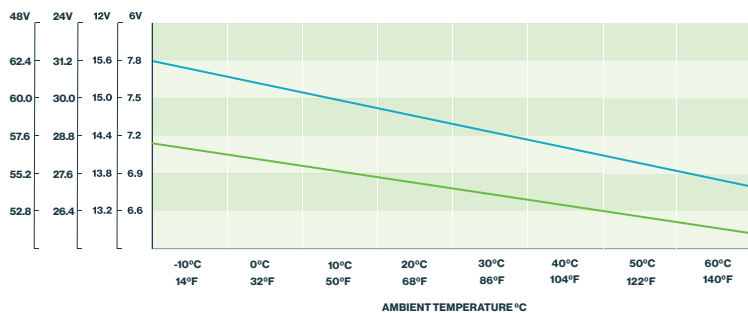

STANDBY USE
CYCLE USE