
Batteries RB Reguero Baterías

DATA SHEET


NO MERCURY ADDED						
Description	Mercury & Cadmium Free Alkaline Manganese Battery, AA Size					
Chemical System	Alkaline Manganese					
Nominal Voltage	1.5 Volts					
Nominal Dimensions	Refer to drawing					
Terminals	Protruded positive (+) and flat negative (-) contacts					
Jacket	Foil jacket					
Applications	All electronic devices, e.g. toys, photographic equipment, data banks, calculators, audio appliances, remote controls, paging machines					
Ambient Temperature Range	Operation: -18°C ~ 50°C Recommended: 10°C ~ 25°C Storage: Not exceed 30°C					
Shelf Life	10 years					
Approx. Weight	23g					

Cross References:								
GP	JIS	IEC	Energizer	Duracell				
15AU	LR6	LR6	E91	MN1500				

Discharge curve:

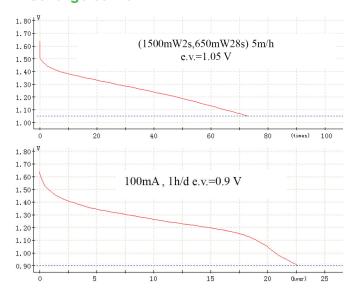

1) Store period before test shall be under 20±2°C, RH 55±20% within 30 days of manufacture.
2) Batteries shall not leak during the service life test before the end voltage reached.

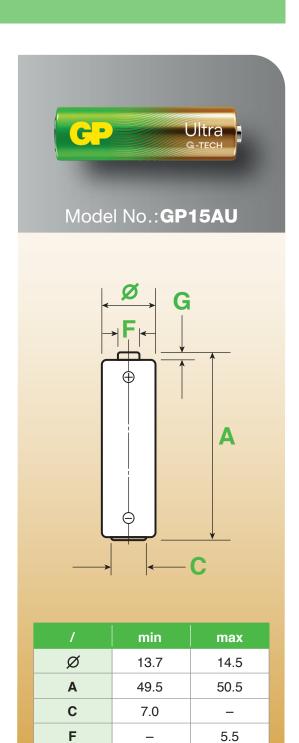

	G	1.0		_					
Dimension : mm									
The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those									

described here, please consult your nearest GP Sales and Marketing

Office or Distributors.