

Specifications

Nominal Voltage		12 V
Capacity (25°C)	100HR(10.8V)	300 Ah
	10HR(10.8V)	250 Ah
	5HR(10.5V)	219Ah
	1HR(9.60V)	157Ah
Dimension	Length	521 ± 2mm (20.51inch)
	Width	269 ± 2mm (10.59inch)
	Height	220 ± 2mm (8.66inch)
	Total Height	T5: 242 ± 2mm (9.53inch) T11: 223 ± 2mm (8.78inch)
Approx. Weight		72.8kg (160.5lbs) ± 3%
Terminal type		T5/T11
Internal resistance (Fully charged, 25°C)		Approx. 2.6m Ω
Capacity affected by temperature (10HR)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-discharge (25°C)	3 month	Remaining Capacity: 91%
	6 month	Remaining Capacity: 82%
	12 month	Remaining Capacity: 65%
Nominal operating temperature		25°C ± 3°C (77°F ± 5°F)
Operating temperature range	Discharge	-15°C ~ 50°C (5°F ~ 122°F)
	Charge	-10°C ~ 50°C (14°F ~ 122°F)
	Storage	-20°C ~ 50°C (-4°F ~ 122°F)
Float charging voltage(25°C)		13.50 to 13.80V Temperature compensation: -18mV/°C
Cyclic charging voltage(25°C)		14.50 to 14.90V Temperature compensation: -30mV/°C
Maximum charging current		75A
Terminal material		Copper
Maximum discharge current		1800A(5 sec.)
Designed floating life(20°C)		15 years

- ◆ Absorbent glass mat technology;
- ◆ Recognized by UL & CE;
- ◆ ABS container.

Constant Current Discharge Characteristics (A, 25°C)

F.V/TIME	15min	30min	60min	2h	3h	4h	5h	6h	8h	10h	20h	100h
9.60V	417	253	157	91.4	63.8	52.3	44.6	39.0	30.6	25.5	13.4	---
9.90V	407	247	154	90.8	63.4	52.0	44.4	38.8	30.4	25.4	13.3	--
10.2V	392	240	150	90.0	62.9	51.6	44.1	38.5	30.2	25.3	13.3	--
10.5V	378	234	147	88.7	62.5	51.3	43.8	38.3	30.0	25.2	13.2	3.03
10.8V	358	225	143	86.4	60.6	49.7	42.4	37.1	29.1	25.0	13.1	3.00


Constant Power Discharge Characteristics (Watt, 25°C)

F.V/TIME	15min	30min	60min	2h	3h	4h	5h	6h	8h	10h	20h	100h
9.60V	4575	2833	1785	1058	750	615	527	461	364	304	160	--
9.90V	4465	2776	1758	1052	745	611	524	458	361	303	160	--
10.2V	4300	2691	1713	1042	740	607	521	455	359	302	160	--
10.5V	4154	2626	1679	1027	735	603	517	452	356	301	159	36.7
10.8V	3934	2530	1628	1001	713	585	502	439	346	299	158	36.2


Note: The above characteristics data can be obtained within three charge/discharge cycles.



Dimensions

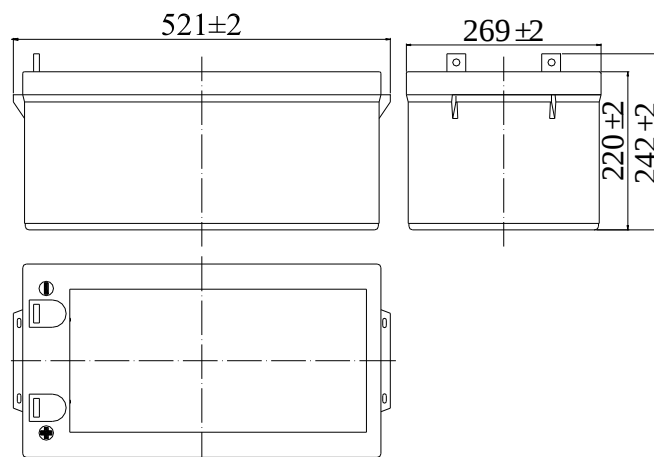


Terminal

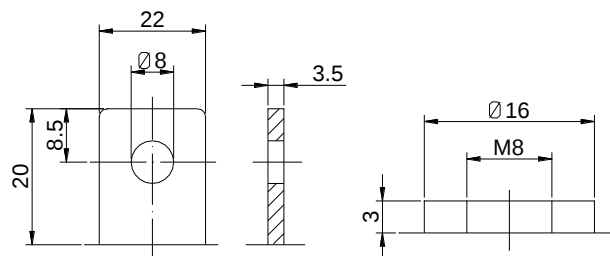


Terminal T5

Terminal T11


Discharge Characteristics(25°C)

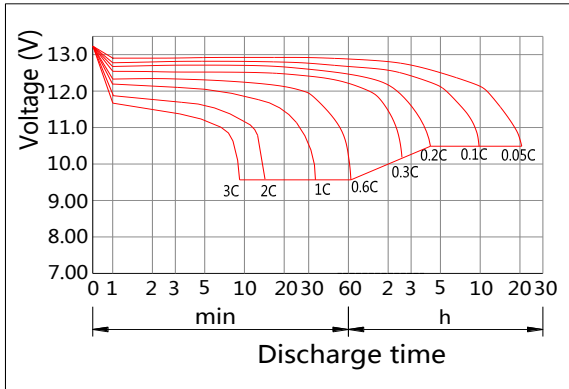


Charging Characteristics(25°C)

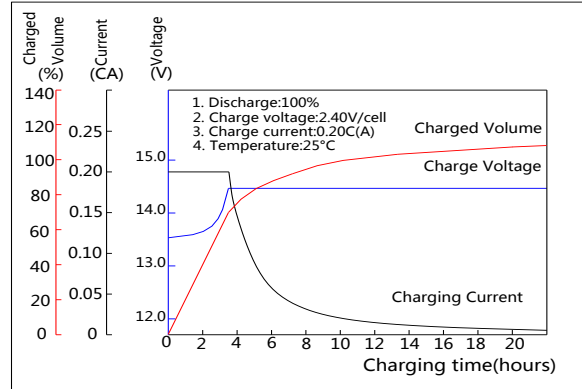


Effect of Temperature on Capacity

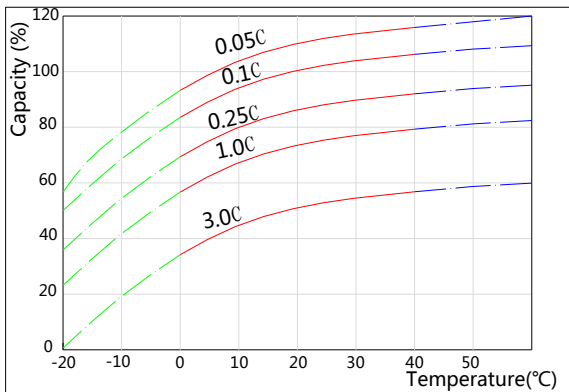


Self-discharge Characteristics

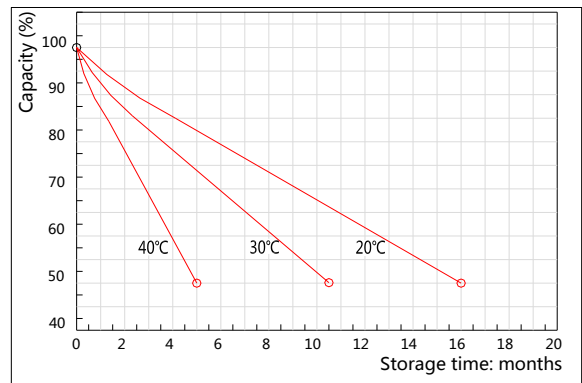


The Relationship for Open Circuit Voltage and Residual Capacity (25°C)

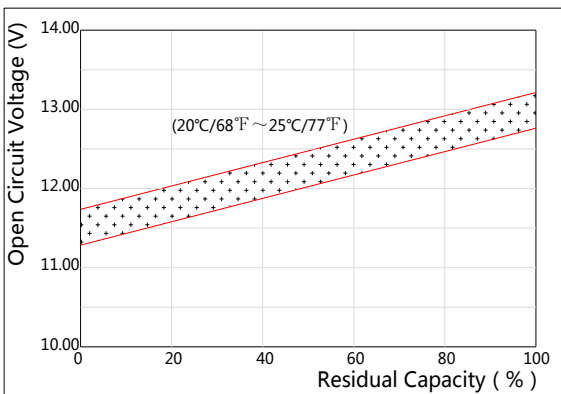

The Relationship for Charging Voltage and Temperature

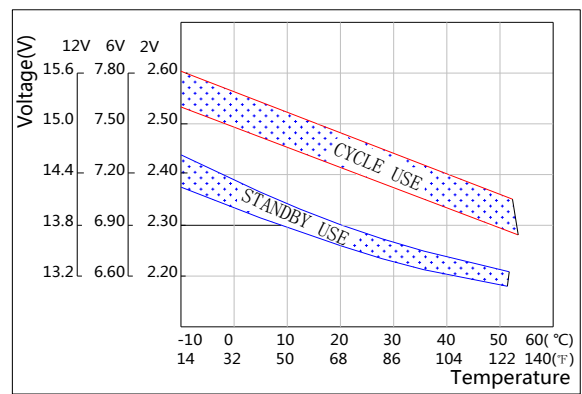

Floating Life on Temperature

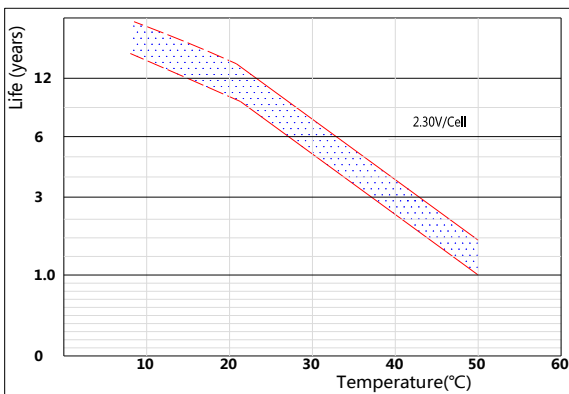

Cycle Life on D.O.D(25°C)

