

FLOODED DEEP CYCLE BATTERY

6 LC L16-HC



Series	LC	Warranty	1 Year
Volts	6	BCI	903
Cells	3	Plates/Cell	17
Terminal Type	DT		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18 x 1-1/2"		

Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

Capacity

Cold Crank Amps (CCA) 0°F / -17°C	1040
Marine Crank Amps (MCA) 32°F / 0°C	1299
Reserve Capacity (RC @ 25A)	828 Minutes
Reserve Capacity (RC @ 75A)	218 Minutes

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 5 Hour Rate	332 Ah	66.4 A
@ 10 Hour Rate	374 Ah	37.4 A
@ 20 Hour Rate	415 Ah	20.75 A

Amphere hour capacity ratings based on specific gravity of 1.280.
Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

Specifications




Weight	55.5 kg	122.5 lbs
Length	318 mm	12.5"
Width	181 mm	7.13"
Height Inc. Term.	425 mm	16.75"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Electrolyte Reserve	57 mm	2.25"
Container	Polypropylene	
Cover	Polypropylene	
Handles	Rope / Plastic Handle	

Cycle Life vs. Depth of Discharge

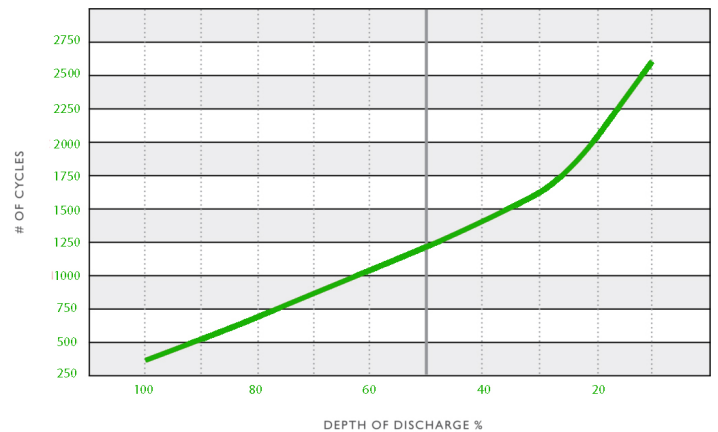

Voltage vs. Depth of Discharge

