



**Specifications:**

Cells Per Unit	6
Voltage Per Unit	12V
Nominal Capacity	53.0Ah @20hour-rate to 1.75V per cell @25°C 44.0Ah @5hour-rate to 1.75V per cell @25°C
Weight	Approx. 14.2Kg ±2% (31.3lbs)
Terminal	R6.2
Cycle Use Voltage	14.77V~14.88V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~55°C Charge: 0°C~40°C Storage: -15°C~40°C
Normal Operating Temperature Range	25°C±5°C
Self Discharge	LIVEN Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Container Material	ABS

**LIVEN LVCD Series**

LVCD series are manufacturing with Lead Carbon active material to perform in partial state of charge (PSoC) applications and double separator configuration. LVCD series are AGM-GEL technology Valve Regulated Lead Acid (VRLA) suitable for Deep Cycle applications. Electrolyte + GEL for longer cycle life. Maintenance-Free Sealed Lead Acid Battery.


**Applications:**

- Wheelchairs
- Golf trolleys
- Electric sweepers
- Floor machines
- Electric vehicles
- Lawn mowers
- Portable power
- Railway and Marine systems
- Medical equipments
- Renewable energies

**Dimensions:**

Length	197±1.5mm (7.76in)
Width	166±1.5mm (6.54in)
Height	170±1.5mm (6.69in)
Total Height	170±1.5mm (6.69in)


**Technical Drawings:**

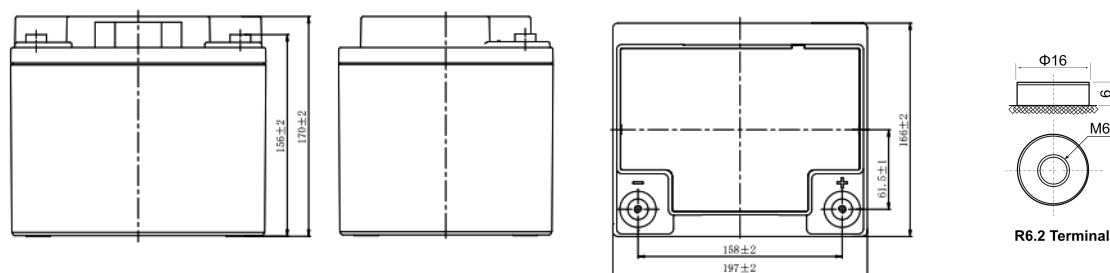


**Constant Current Discharge (CC, Unit: A) at 25°C (77°F)**

Voltage (V)	Capacity (Ah)			
	20h	10h	5h	3h
12	53	46	44	40


**Charging Profile**

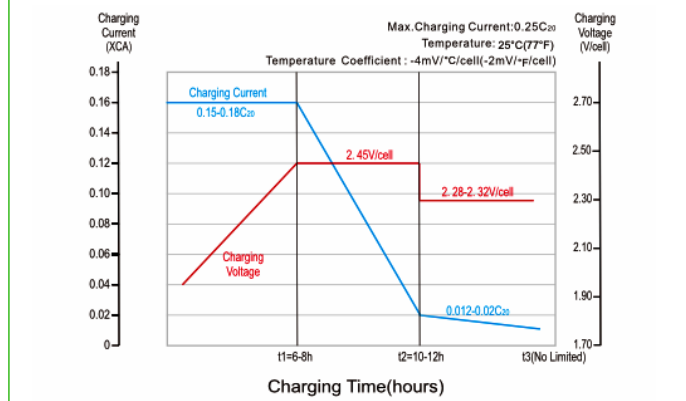

**Relationship of OCV and State Of Charge(25°C,77°F)**

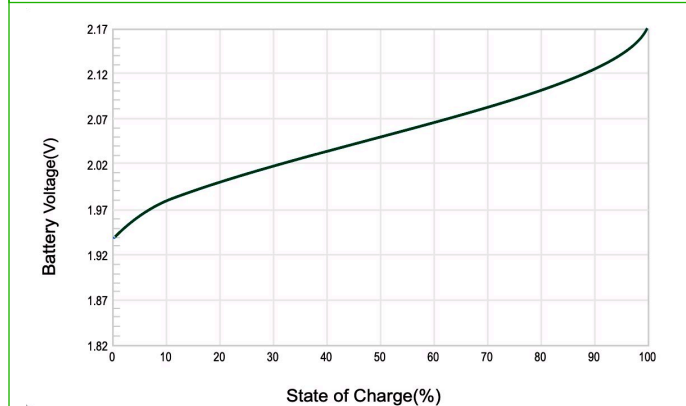

**Cycle Life in Relation to Depth Of Discharge**

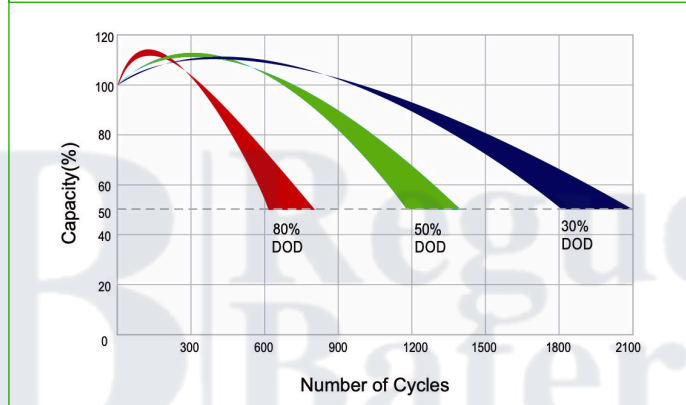

**Self-discharge Characteristic**

