



### LIVEN LVHR Series

AGM (Absorbent Glass Material) technology with gas recombination. The LVHR series Valve Regulated Lead Acid (VRLA) battery is designed for heavy load discharge applications with 10~12 years design life in float service. By using strong grids and specially designed active material is with lower I.R, lower self discharge rate, high power, and longer service life performance. Generally the LVHR series offers 30% more power output than the standard range.


### Applications:

- High Power
- UPS
- Datacenters
- Emergency backup PW
- Security system
- Communication power supply
- DC power supply

### Dimensions:

Length	195±1mm (7.68in)
Width	130±1mm (5.12in)
Height	155±1mm (6.10in)
Total Height	167±1mm (6.57in)

### Technical Drawings:

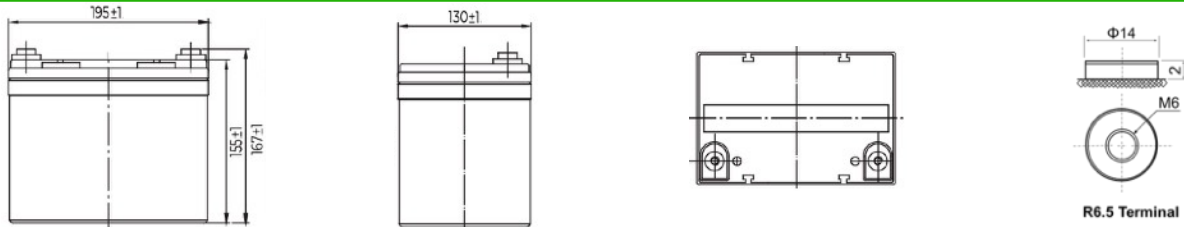

### Constant Current Discharge (CC, Unit: A) at 25°C (77°F)

F.V./ Time	10min	15min	20min	30min	45min	60min	2h	3h	4h	5h
1.60V	90.93	74.43	56.16	39.79	29.30	23.90	12.10	8.65	6.97	6.06
1.67V	86.86	72.19	53.93	38.48	28.40	23.30	12.00	8.57	6.91	6.01
1.70V	84.61	69.94	52.82	37.77	27.90	23.00	11.90	8.54	6.88	5.98
1.75V	80.97	67.58	51.01	36.87	27.20	22.50	11.70	8.48	6.83	5.94
1.80V	76.47	64.05	48.28	35.55	26.20	21.80	11.40	8.23	6.63	5.76


### Constant Power Discharge (CP, Unit: W/Battery) at 25°C (77°F)

F.V./ Time	10min	15min	20min	30min	45min	60min	2h	3h	4h	5h
1.60V	998.8	812.0	648.4	460.6	339.6	277.2	141.0	102.0	82.2	72.0
1.67V	955.1	780.0	624.2	446.0	328.8	270.0	139.8	101.4	81.6	71.4
1.70V	930.1	763.6	612.1	437.5	322.8	266.4	139.2	100.8	81.6	70.8
1.75V	886.4	739.3	590.2	427.3	315.0	261.0	136.8	100.2	81.0	70.8
1.80V	836.5	696.9	559.3	411.5	303.6	252.6	133.2	97.2	78.6	68.4


### Specifications:

Cells Per Unit	6
Voltage Per Unit	12V
Nominal Capacity	780W @15min-rate to 10.02V per battery @25°C
Weight	Approx. 11.50Kg ±2% (25.40lbs)
Internal Resistance	Approx. 8.0mΩ
Terminal	R6.5
Max. Discharge Current	330A (5sec)
Design Life	Up to 10 years in Standby use (25°C) Eurobat (20°C): 10~12 years Long Life
Recommended Max. Charging Current	10.40A
Reference Capacity	C20 35Ah
Standby Use Voltage	13.5V~13.8V @ 25°C Temperature Compensation: -18mV/°C/Cell
Cycle Use Voltage	14.5V~15.0V @ 25°C Temperature Compensation: -30mV/°C/Cell
Operating Temperature Range	Discharge: -15°C~50°C Charge: -10°C~45°C Storage: -15°C~50°C
Normal Operating Temperature Range	25°C±5°C
Self Discharge	LIVEN Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.


**Discharge Characteristics Curve**

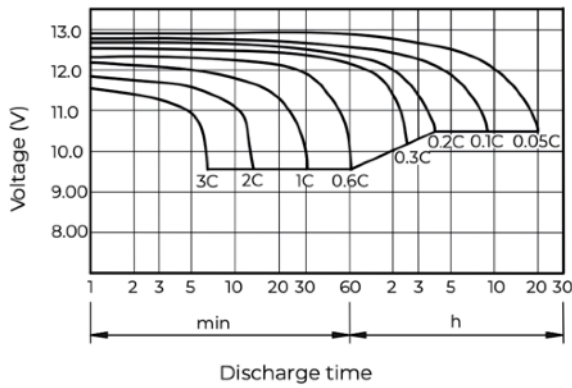


**Charging Characteristics**

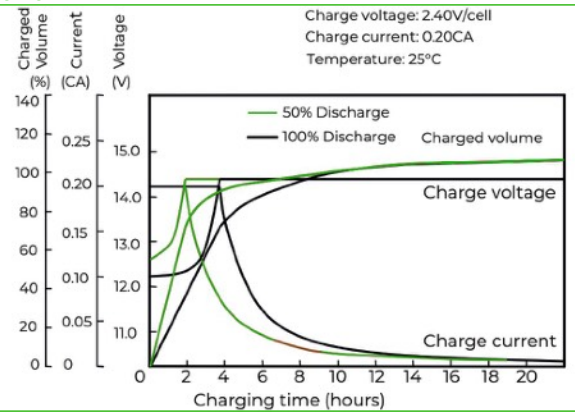


**Cycle Life In Relation To Depth Of Discharge**

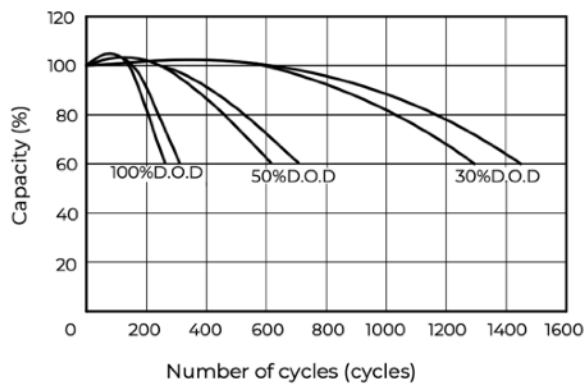


**Relationship Between Charging Voltage And Temperature**

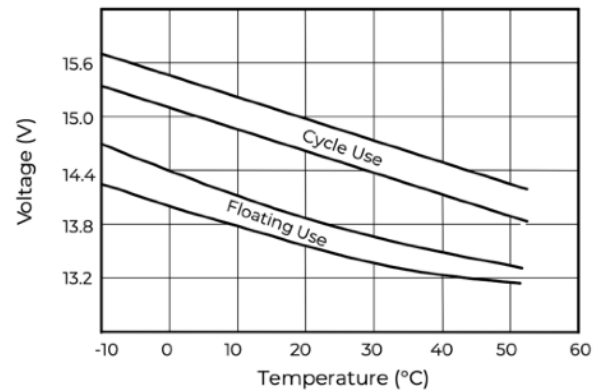


**Temperature Effects On Capacity**

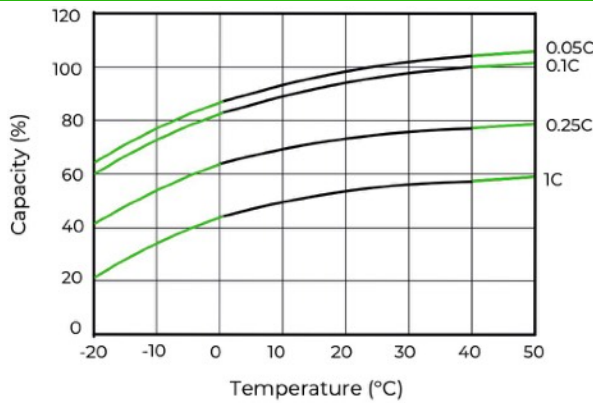

**Storage Characteristics**

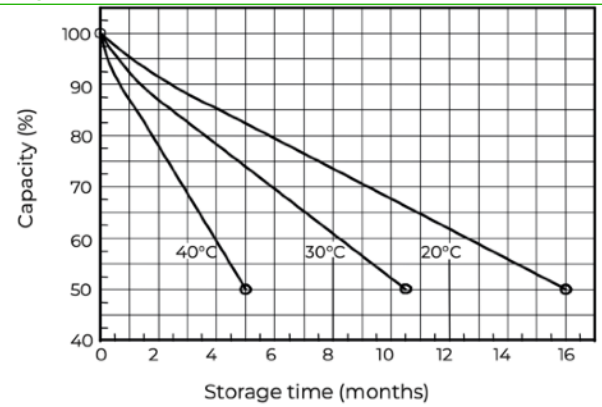

**Effect Of Temperature On Long Term Life**

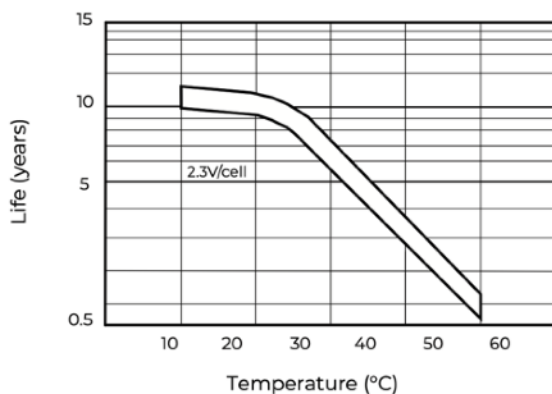

**Relationship For OCV And Capacity**

