

PRODUCT SPECIFICATION

23A SIZE BATTERY

Type Designation : 23A
(Mercury & Cadmium & Lead Free)

Prepared by : _____

Checked by : _____

Approved by : _____

Issued Date : 2016-01-27

Product Specification

Model No.:23A (Mercury & Cadmium &Lead Free)

1. Scope:

This specification is applicable to Pairdeer high voltage alkaline cell, 23A (Mercury & Cadmium & Lead Free),

2. Law & Regulation Compliances:

This product complies with EU's battery directive (2013/56/EU).

Packaging materials comply with EU's directive on packaging materials and waste (94/62/EC)

3. General:

3.1 Type designation

GP	23A
Duracell	MN21


3.2 Chemical system: Zinc / Manganese Oxide

3.3 Nominal voltage: 12 V

3.4 Weight: Approximate 7.9g

3.5 Dimension (mm)

/	min	max
Φ	9.90	10.60
A	27.70	28.50
F	5.2	5.8

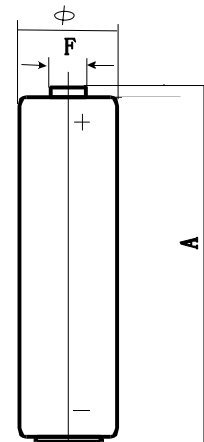

3.6 Capacity: Approximate 50mAh (10kΩ ,24h/d, 20°C, e.v.:6.0V)

3.7 Heavy Metal Contents: Hg ≤5 ppm, Cd≤20ppm, Pb≤40ppm

3.8 Operation temperature : -18°C~50°C
 Recommend storage : 0~30°C, 55±20%RH

4. Appearance

The battery visually inspected by unaided eye 30cm away from battery. The battery shall be free from dents, scratch, rust and extruded internal compounds, such as sealing compounds and etc, and serious displacement of artwork. Appearance defects shall not be observed that may adversely affect actual use or performance of batteries.

Model No.:23A (Mercury & Cadmium &Lead Free)

5. Electrical Characteristics

Unless otherwise stated, all measurements are to be performed at a **Standard Environment** of

**20 ± 2°C
55± 20%RH.**

All samples are normalized for 8 hours at least at the above environment prior to measurement. The digital voltmeter (DCM) is with the precision of 1mV (internal resistance not less than 1 Megohm). The load resistance of the total circuit is accurate within ±0.5% of the specified value.

5.1 Open circuit voltage

/	OCV(V)
Initial	≥12.0

5.2 Service output

Load	10KΩ
Test mode	24h/d
end voltage	6.0V
Initial (MAD)	≥52 h
the delayed discharge performance stored 12 months is above 90% of initial	

m: minute h: hour d: day

*The initial discharge test shall commence within 30 days of manufacture. During stored period, the cells shall be stored under 20±2°C, RH55±20% conditions.

6. Expiry Date:

1 year

7. Expiry Date Marking:

7.1 Unless otherwise specified, each battery will carry a manufacturing date code followed by month and year of manufacturing for domestic and manufacturing date code followed by month and year of expiry for export. (Shelf life 1 year)

8. Packaging Requirements

8.1 The total of heavy metal lead, cadmium, mercury, and hexavalent chromium concentration shall not exceed 100 ppm in Packaging materials and printing inks. Ozone depleting substances (ODS) shall not be used in the manufacturing of any packaging.

The printing on each cell label is legible and permanent. Label defects, if any, shall conform to mutually agreed upon limit samples.

8.2 Otherwise packaging for shipment and sales shall conform to the mutually agreed to Packaging Specification of the designated customers.

Model No.:23A (Mercury & Cadmium &Lead Free)

Chart 1. Discharge diagram

