

## **MOTIVE L16HG-AC**

MODEL L16HG-AC with Bayonet Cap

VOLTAGE 6

MATERIAL Polypropylene DIMENSIONS Inches (mm)

BATTERY Deep-Cycle Flooded/Wet Lead-Acid Battery

COLOR Maroon

WATERING HydroLink™ Watering System





### **6 VOLT**

#### **PHYSICAL SPECIFICATIONS**

BCI	MODEL NAME	VOLTAGE	CELL(S)	TERMINAL TYPE <sup>G</sup>	DIMENSIONS <sup>©</sup> INCHES (mm)			WEIGHT HLBS. (kg)
002	LIGHC AC	6	2	7	LENGTH	WIDTH	HEIGHT F	125 (57)
903	L16HG-AC	0	3		12.14 (308)	6.85 (174)	16.41 (417)	

#### **ELECTRICAL SPECIFICATIONS**

CRANKING PERFORMANCE		CAPACITY A MINUTES		CAPACITY <sup>B</sup> AMP-HOURS (Ah)			ENERGY (kWh)	INTERNAL RESISTANCE (mΩ)	SHORT CIRCUIT CURRENT (amps)	
C.C.A. <sup>D</sup> @ 0°F (-18°C)	C.A. <sup>E</sup> @ 32°F (0°C)	@ 25 Amps	@ 75 Amps	5-Hr	10-Hr	20-Hr	100-Hr	100-Hr		
_	_	935	245	357	400	435	483	2.89	_	_

#### **CHARGING INSTRUCTIONS**

CHARGER VOLTAGE SETTINGS (AT 77°F/25°C)						
SYSTEM VOLTAGE	6V	12V	24V	36V	48V	
Bulk Charge	7.41	14.82	29.64	44.46	59.28	
Float Charge	6.75	13.50	27.00	40.50	54.00	
Equalize Charge	8.10	16.20	32.40	48.60	64.80	

Do not install or charge batteries in a sealed or non-ventilated compartment. Constant under or overcharging will damage the battery and shorten its life as with any battery.

#### **CHARGING TEMPERATURE COMPENSATION**

ADD	SUBTRACT
0.005 volt per cell for every 1°C below 25°C 0.0028 volt per cell for every 1°F below 77°F	0.005 volt per cell for every 1°C above 25°C 0.0028 volt per cell for every 1°F above 77°F

### **OPERATIONAL DATA**

OPERATING TEMPERATURE	SELF DISCHARGE
-4°F to 113°F (-20°C to +45°C). At temperatures below 32°F (0°C) maintain a state of charge greater than 60%.	5-15% per month depending on storage temperature conditions.

#### **RECYCLE RESPONSIBLY**








#### **STATE OF CHARGE** MEASURE OF OPEN-CIRCUIT VOLTAGE

PERCENTAGE CHARGE	SPECIFIC GRAVITY	CELL	6 VOLT	
100	1.277	2.122	6.37	
90	1.258	2.103	6.31	
80	1.238	2.083	6.25	
70	1.217	2.062	6.19	
60	1.195	2.040	6.12	
50	1.172	2.017	6.05	
40	1.148	1.993	5.98	
30	1.124	1.969	5.91	
20	1.098	1.943	5.83	
10	1.073	1.918	5.75	


#### TROJAN L16HG-AC PERFORMANCE


# **Estimation Purposes Only** Discharge Current (amps) 10 100 1000 10000 100000


#### PERCENT CAPACITY VS. TEMPERATURE

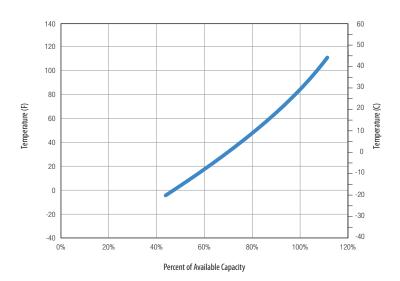


#### **BATTERY DIMENSIONS** (shown with UT)







#### TERMINAL CONFIGURATIONS<sup>6</sup>

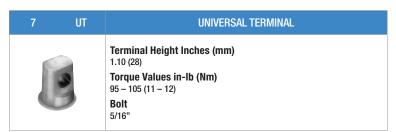

- The number of minutes a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above
- 1.75 Wcell. Capacities are based on peak performance.

  The amount of amp-hours (Ah) a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 Wcell. Capacities are based on peak performance.
- Dimensions may vary depending on type of handle or terminal. Batteries should be mounted with 0.5 inches (12.7 mm) spacing minimum. C.C.A. (Cold Cranking Amps) - the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 0°F (-18°C) at a voltage above 1.2 V/cell.
- E. C.A. (Cranking Amps) the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 32°F (0°C) at a voltage above
- CA. Cleaning Anjap. The deschaleg level in a Imperes which a reviv, may view go deater your institution to 5 seconds at 32 1.2 Woell. This is sometimes referred to as marine cranking amps @ 32°F or M.C.A. @ 32°F. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal. Terminal images are representative only.
- H. Weight may vary.





Designed in compliance with applicable BCI, DIN, BS and IEC standards. Tested in compliance to BCI and IEC standards.

