


## CNFL12075 DEEP CYCLE CARBON NANO FLOODED

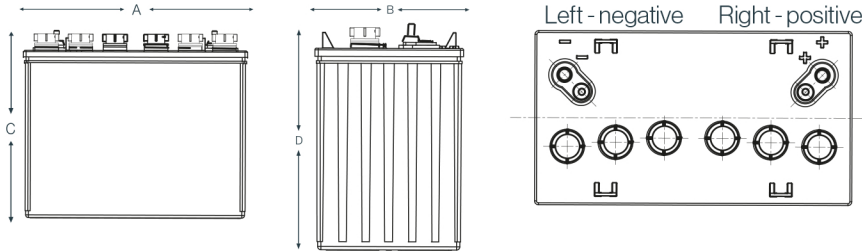

### Electrical Specifications


<b>C5 Capacity</b>	120Ah
<b>C20 Capacity</b>	150Ah
<b>Voltage</b>	12V
<b>80% DOD Voltage Cutoff</b>	11.5V
<b>Self Discharge</b>	Less than 3% per month (20°C/68°F)
<b>Charge Temperature</b>	Min: -10°C (14°F) / Max: 50°C (122°F)
<b>Discharge Temperature**</b>	Min: -40°C (-40°F) / Max: 50°C (122°F)
<b>Storage</b>	Min: -20°C (-4°F) / Max: 60°C (140°F)

### Mechanical Specifications

<b>Industry Reference</b>	GC12	
<b>Length (A)</b>	13.1 in	333 mm
<b>Width (B)</b>	7.2 in	183 mm
<b>Height over lid (C)</b>	9.8 in	248 mm
<b>Height over stud (D)</b>	11.0 in	280 mm
<b>Weight</b>	85.9 lbs	39 kgs
<b>Terminal (Opt'l)</b>	UTL	
<b>Cell(s)</b>	6	
<b>Electrolyte</b>	Flooded	
<b>Terminal Torque Nm</b>	11-12Nm	

NOTE: There is a tolerance of +/-2%.

### Capacity vs Temperature

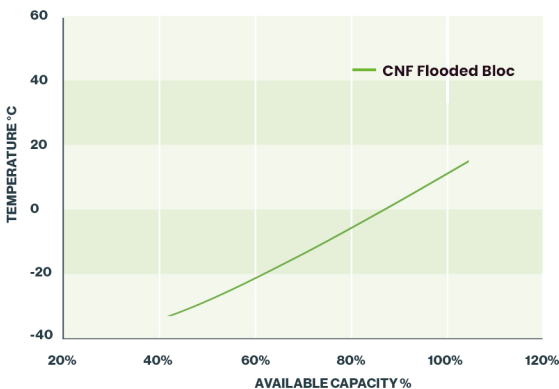

**IUI Charging**  
 $I_1 = \text{min. } 12\% C_5 \text{ max. } 40\% C_5$   
 $U = 2.45 \text{ V per cell}$   
 $I_2 = 6\% C_5 \text{ for max. 4 hours}$



### Features

- Ultra energy efficient due to low resistance
- Increased cycle life due to Carbon Nano Tube Technology
- Suitable for opportunity charging
- Cost savings due to increased efficiency
- Up to 2 x faster recharge
- Allows for opportunity charging to give you those extra running times when required
- Suitable for extreme temperature variants

### Applications

- Golf carts, including electric vehicles
- Access Work Platform (AWP)
- Cleaning Machines
- Maritime
- Wheelchairs
- Solar & Renewable Energy
- Traffic Systems
- Caravans / Motorhomes RV's
- Home Invertor

### UTL Positive & Negative

