



LIVEN LVIF Series-LiFePO₄

- > High performance, completely maintenance-free, low self-discharge
- > Floating & standby use: up to 10 years
- > 100% precise quality testing, stable quality and high reliable performance
- > Uniform output voltage in all the discharge curve
- > Provide full nominal capacity, even at high currents
- > Energy density: up to 130Wh/kg
- > Capacity density: up to 145Ah/kg
- > Suitable for standby power and energy storage power use
- > Long storage time
- > Cycle use: Up to 2000 cycles at 100% DOD

Application:


- > Telecommunications
- > Uninterruptable Power Supply (UPS)
- > DC power supply
- > Electric Power System (EPS)
- > Emergency backup power supply
- > Wheelchairs and Scooters
- > Golf trolleys and Golf cart
- > Railway and Marine systems
- > Electric tools
- > Medical equipments

Specification:

NOMINAL VOLTAGE		12.8 V
NOMINAL CAPACITY (0.2C, 25°C).		32.4±2Ah
DISCHARGE	NORMAL CURRENT	40A
	MAX CONTINUOUS CURRENT	≤80A (≤ 5min)
	CUT-OFF VOLTAGE	10±0.2V
CHARGE	CHARGE VOLTAGE	14.4±0.15V
	CHARGE CURRENT	≤ 16A
	CHARGE MODE	CC/CV, use special Lithium LFP Charger.
INNER RESISTANCE	DISCHARGING INNER RESISTANCE	≤ 40mΩ
CONFIGURATION		04S09P
OPERATION TEMPERATURE RANGE		CHARGE 0°C~+45°C
<i>(When the environment temperature is higher than 45°C, please pay attention to ventilation and heat rejection)</i>		DISCHARGE -20°C~+60°C
STORAGE TEMPERATURE RANGE (Capacity 80%)		0°C~ +40°C
<i>(Recommended long term storage temperature is 15~25°C)</i>		
HUMIDITY RANGE		CHARGE-DISCHARGE RH= 85%, When the environment humidity is higher than 85%, please pay attention to protect.
<i>(When the environment temperature is higher than 45°C, please pay attention to ventilation and heat rejection)</i>		STORAGE RH= 50%, Easily oxidized components note sealed.
BP PROTECTION - BMS FEATURES		
<i>OVP=Over charge protection; UVP=Over discharge protection; SC=Short-circuit; TEMP=Temperature levels protection (Charge & Discharge); BF=Balanced Function</i>		OVP, UVP, SC, TEMP, BF
BATTERY PACK HOUSING		Plastic case.
DIMENSIONS (LxWxH) (mm)		194±2mm x 130.0±2mm x 162±2mm
WEIGHT (kg)		4.70 ±0.1kg
CYCLE		Standard charge at 0.2C (A), rest 0.5~1h, discharge at 0.2C to cut off voltage, rest 0.5~1h, repeat the above steps until 1500 cycles. (capacity retention rate= 80%)


Drawing:

Unit: mm Dimension: 194 (L) x 130 (W) x 162 (L)

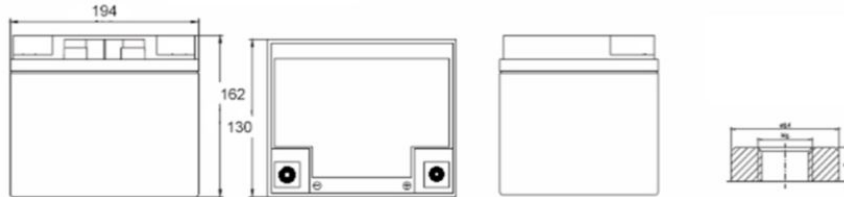


Battery Characteristic Curve at 25°C (77°F)

12V LiFePO4 Battery Charge Curve; 0.2C; 25°C

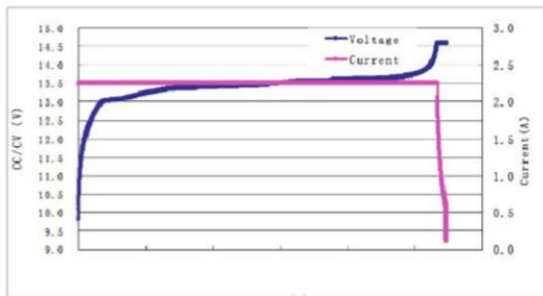


12V LiFePO4 Battery Different Rate Discharge Curve; 25°C

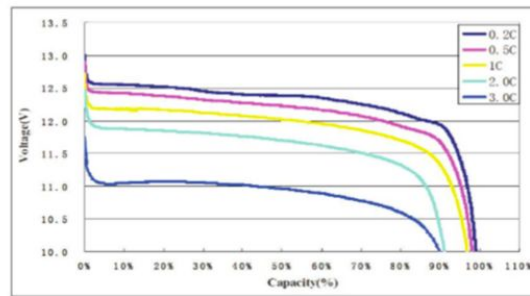


Cell feature Curves at 25°C (77°F)


Charge-Discharge characteristic Curve

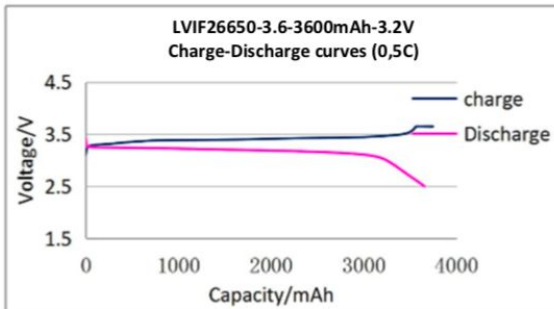

Discharge characteristic Curves

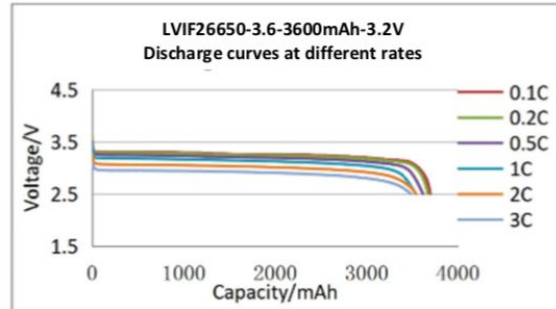

Discharge Curves at different Temperatures

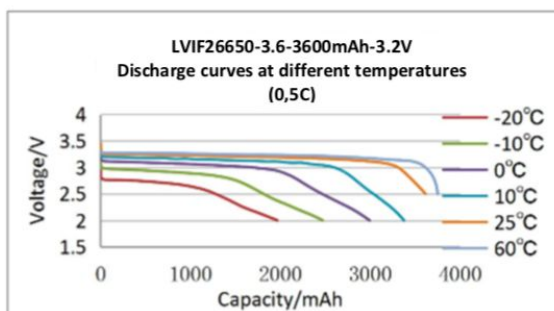

Life characteristics of cyclic use

