


Specifications

Nominal Voltage		12V
Rated Capacity (20 hour rate)		65AH
Dimension	Total Height (with terminals)	186.5mm(7.34inches)
	Height	182.5mm(7.19inches)
	Length	261mm(10.28inches)
	Width	171.5mm(6.75inches)
Weight		Approx.21.3kg (46.96lbs)


Discharge characteristics 77°F (25°C)

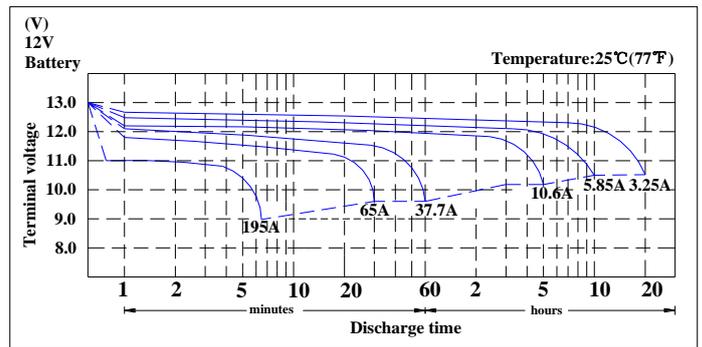

Characteristics

Capacity 77°F (25°C)	20 hour rate (3.25A to 10.5Volts)	65AH
	10 hour rate (5.85A to 10.5Volts)	58.5AH
	5 hour rate (10.7A to 10.2Volts)	53AH
Internal Resistance	Full charged Battery 77°F (25°C)	5.8 mΩ
Capacity affected by Temperature (20 hour rate)	104°F (40°C)	102%
	77°F (25°C)	100%
	32°F (0°C)	85%
	5°F (-15°C)	65%
Self-Discharge 77°F (25°C)	Capacity after 3 month storage	91%
	Capacity after 6 month storage	82%
	Capacity after 12 month storage	64%
Standard Terminal	M8	
Max. Discharge Current 77°F (25°C)	900A (5s)	
Cranking Performance	Cranking Amps (30-sec amps to 7.2V @ 32° F (0° C))	585A
	Cold Cranking Amps (30-sec amps to 7.2V @ 0° F (-18° C))	490A
Reserve Capacity (Minutes to 10.5V at 80°F (27°C))	@ 25Amps	103Min
	@ 75Amps	26Min
Charging (Constant Voltage)	Cycle	Initial Charging Current 13A Or Small 14.5V~14.9V/77°F (25°C)
	Float	13.6V~13.8V/77°F (25°C)

Duration of discharge vs. Discharge current

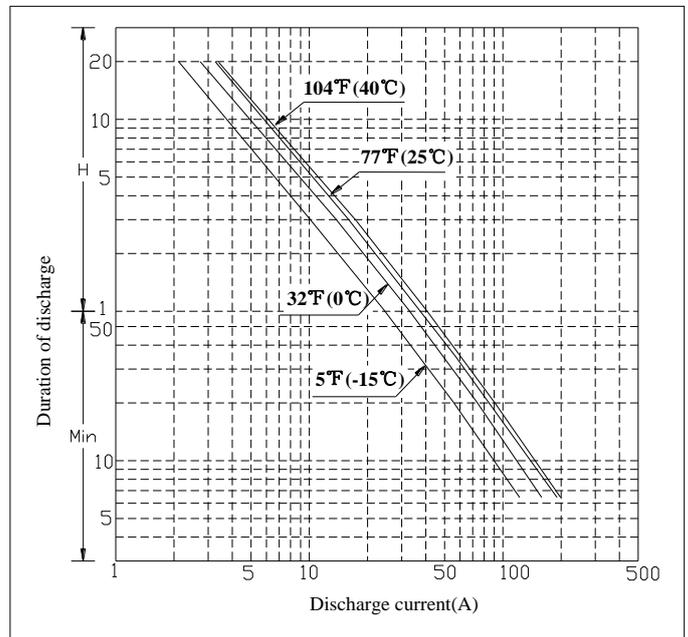

Constant Current Discharge Rating Amperes @ 77 °F (25°C)

Cut off voltage V/cell	15M	30M	45M	1H	2H	3H	5H	8H	10H	12H	20H	24H
1.75V	98	60	45	36.4	20	15.5	10.3	7.1	5.85	4.98	3.25	2.72