

DATA SHEET



NO MERCURY ADDED

Description	Mercury & Cadmium Free Alkaline Manganese Battery, AAA Size
Chemical System	Alkaline Manganese
Nominal Voltage	1.5 Volts
Nominal Dimensions	Refer to drawing
Terminals	Protruded positive (+) and flat negative (-) contacts
Jacket	Foil jacket
Applications	All electronic devices, e.g. toys, photographic equipment, data banks, calculators, audio appliances, remote controls.
Ambient Temperature Range	Operation: -18°C ~ 50°C Recommended: 10°C ~ 25°C Storage: Not exceed 30°C
Shelf Life	5 years
Approx. Weight	11.5g

Cross References:


GP	JIS	IEC	Energizer	Duracell	Varta
24AU	LR03	LR03	E92	MN2400	4003

Discharge curve:

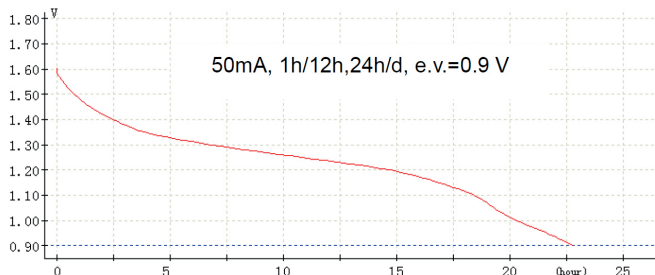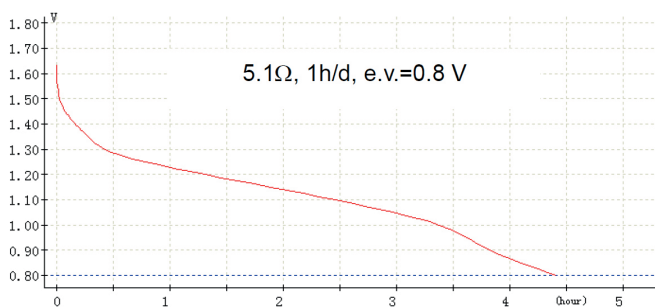


Remarks

- 1) Store period before test shall be under 20±2°C, RH 55±20% within 30 days of manufacture.
- 2) Batteries shall not leak during the service life test before the end voltage reached.



Model No.: **GP24AU**

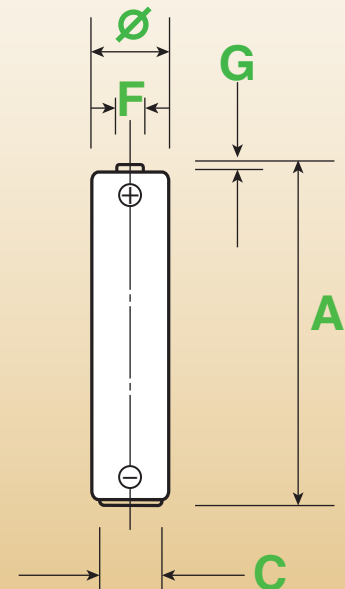

/	min	max
Ø	9.8	10.5
A	43.5	44.5
C	4.3	—
F	—	3.8
G	0.8	—

Dimension : mm

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.