

### Specifications:

<b>Cells Per Unit</b>	6
<b>Voltage Per Unit</b>	12V
<b>Nominal Capacity</b>	108.0Ah @20hour-rate to 1.75V per cell @25°C 96.0Ah @5hour-rate to 1.75V per cell @25°C
<b>Weight</b>	Approx. 27.8Kg ±2% (61.3lbs)
<b>Terminal</b>	R8.8
<b>Recommended Maximum Charging Current</b>	21.6A
<b>Cycle Use Voltage</b>	14.40V~14.70V @ 25°C Temperature Compensation: -4mV/°C/Cell
<b>Operating Temperature Range</b>	Discharge: -20°C~55°C Charge: 0°C~40°C Storage: -15°C~40°C
<b>Normal Operating Temperature Range</b>	25°C±5°C

### LIVEN LVDC Series

LVDC series are manufacturing with Lead Carbon active material to perform in partial state of charge (PSoC) applications and double separator configuration. LVDC series are AGM-GEL technology Valve Regulated Lead Acid (VRLA) suitable for Deep Cycle applications. Electrolyte + GEL for longer cycle life. Maintenance-Free Sealed Lead Acid Battery.

### Applications:

- Wheelchairs
- Golf trolleys
- Electric sweepers
- Floor machines
- Electric vehicles
- Lawn mowers
- Portable power
- Railway and Marine systems
- Medical equipments
- Renewable energies

### Dimensions:

Length	306±1.5mm (12.5in)
Width	168±1.5mm (6.61in)
Height	208±1.5mm (8.19in)
Total Height	214±1.5mm (8.43in)


### Self Discharge

LIVEN Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.

### Container Material

ABS


### Technical Drawings:

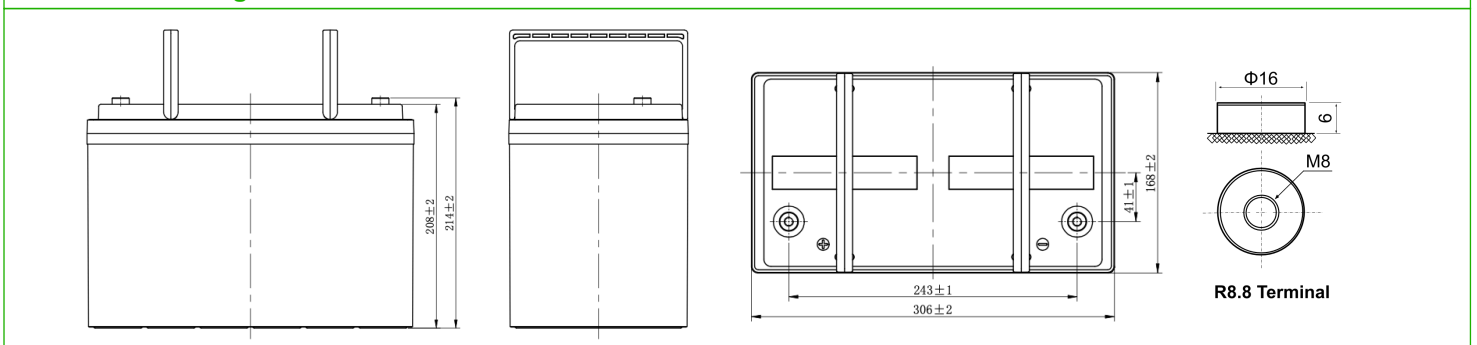


### Constant Current Discharge (CC, Unit: A) at 25°C (77°F)

Voltage (V)	Capacity (Ah)				Reserve Capacity (Min)	
	20h	10h	5h	3h	25A	75A
12	108	104	96	90	195	44


**Charging Profile**

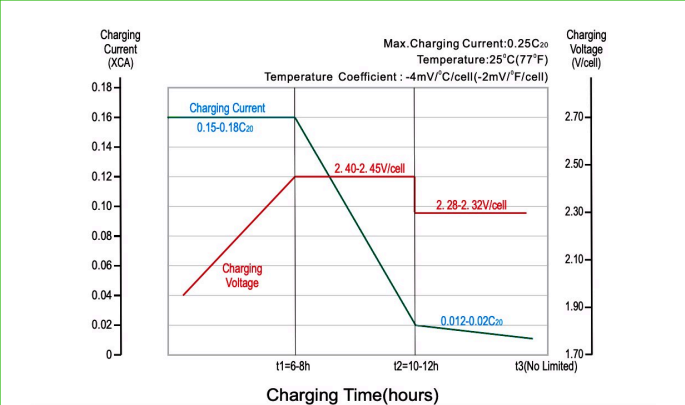

**Relationship of OCV and State Of Charge(25°C,77°F)**

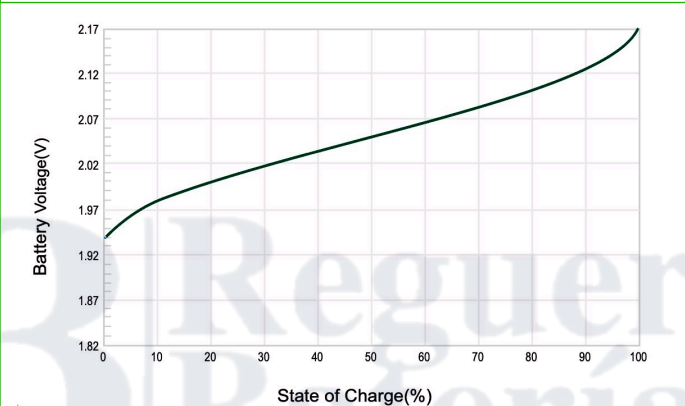

**Cycle Life in Relation to Depth Of Discharge**

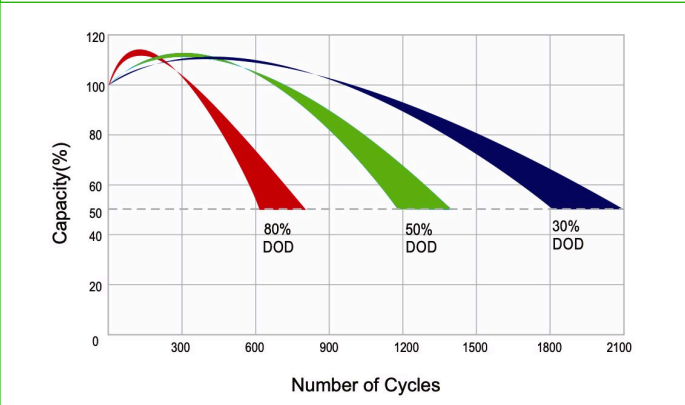

**Self-discharge Characteristic**

