



LIVEN LVIF Series-LiFePO₄

- High performance, completely maintenance-free, low self-discharge
- Floating & standby use: up to 10 years
- 100% precise quality testing, stable quality and high reliable performance
- Uniform output voltage in all the discharge curve
- Provide full nominal capacity, even at high currents
- Energy density: up to 130Wh/kg
- Capacity density: up to 145Ah/kg
- Suitable for standby power and energy storage power use
- Long storage time
- Cycle use: Up to 2000 cycles at 100% DOD


Application:

- Telecommunications
- Uninterruptable Power Supply (UPS)
- DC power supply
- Electric Power System (EPS)
- Emergency backup power supply
- Wheelchairs and Scooters
- Golf trolleys and Golf cart
- Railway and Marine systems
- Electric tools
- Medical equipments

Specification:


NOMINAL VOLTAGE		12.8 V
NOMINAL CAPACITY (0.2C, 25°C)		4.8±0.5Ah
DISCHARGE	NORMAL CURRENT	5.0A
	MAX CONTINUOUS CURRENT	10A (≤ 5min)
	CUT-OFF VOLTAGE	10±0.2V
CHARGE	CHARGE VOLTAGE	14.4±0.15V
	CHARGE CURRENT	≤ 2.5A
	CHARGE MODE	CC/CV, use special Lithium LFP Charger.
INNER RESISTANCE	DISCHARGING INNER RESISTANCE	≤ 100mΩ
CONFIGURATION		04S03P
OPERATION TEMPERATURE RANGE		
<i>(When the environment temperature is higher than 45°C, please pay attention to ventilation and heat rejection)</i>		
CHARGE		0°C~+45°C
DISCHARGE		-20°C~+60°C
STORAGE TEMPERATURE RANGE (Capacity 80%)		
<i>(Recommended long term storage temperature is 15~25°C)</i>		
CHARGE		0°C~ +40°C
HUMIDITY RANGE	CHARGE-DISCHARGE	RH= 85%, When the environment humidity is higher than 85%, please pay attention to protect.
	STORAGE	RH= 50%, Easily oxidized components note sealed.
BP PROTECTION - BMS FEATURES		
<i>OVP=Over charge protection; UVP=Over discharge protection; SC=Short-circuit; TEMP=Temperature levels protection (Charge & Discharge); BF=Balanced Function</i>		OVP, UVP, SC, TEMP, BF
BATTERY PACK HOUSING		Plastic case.
DIMENSIONS (LxWxH) (mm)		90±3mm x 70±2mm x 101±2mm
WEIGHT (kg)		0.67 ±0.1kg
CYCLE		Standard charge at 0.2C (A), rest 0.5~1h, discharge at 0.2C to cut off voltage, rest 0.5~1h, repeat the above steps until 1500 cycles. (capacity retention rate= 80%)

Drawing:

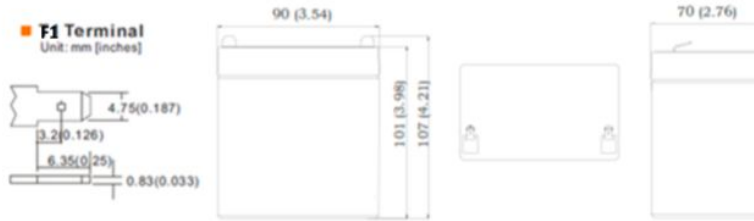


Battery Characteristic Curve at 25°C (77°F)

12V LiFePO4 Battery Charge Curve; 0.2C; 25°C

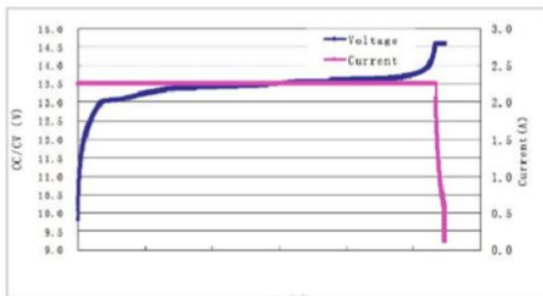


12V LiFePO4 Battery Different Rate Discharge Curve; 25°C

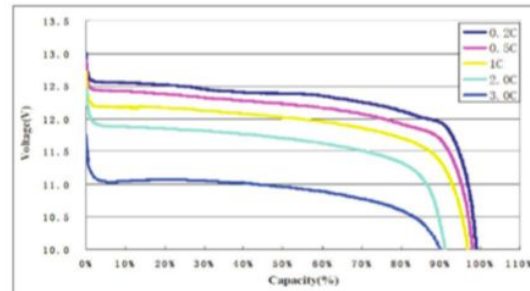


Cell feature Curves at 25°C (77°F)


Charge-Discharge characteristic Curve

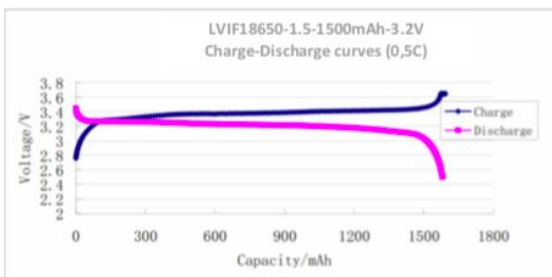

Discharge characteristic Curves

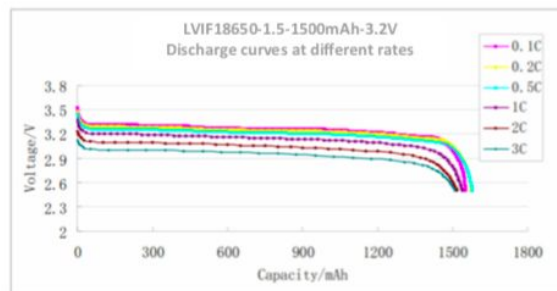

Discharge Curves at different Temperatures

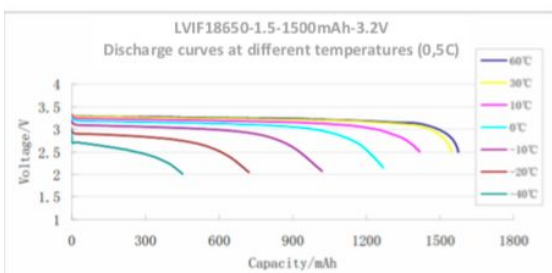

Life characteristics of cyclic use

